



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR2800-DA-xx-U style)



### WEDGE ACTION SERIES 2800-D RESTRAINT GLAND FOR DUCTILE IRON PIPE

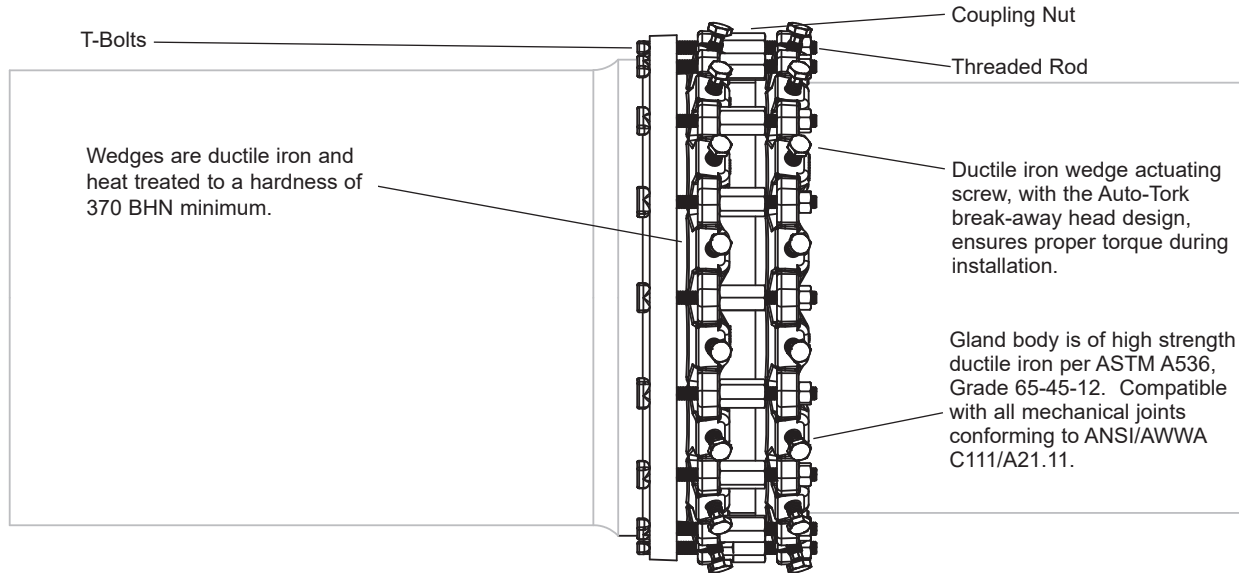

NOM. PIPE SIZE	O.D. (IN.)	CATALOG NUMBER	PRESSURE RATING (PSI)	APPROX. WEIGHT (LBS.)	MAX RESTRAINT O.D.* (IN.)	✓ SUBMITTED ITEM(S)
30"	32.00	UFR2800-DA-30-U	350	442	38.6	
36"	38.30	UFR2800-DA-36-U	350	520	44.9	

\* Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

### FEATURES

- Eliminates the need of costly and time consuming concrete thrust blocks and corrosion susceptible steel tie rods
- Auto-Tork wedge actuating screws assure proper installation
- High strength, low alloy t-bolts, coupling nuts, threaded rods and nuts per AWWA C111
- SBR Uni-Seal gasket per ASTM D2000
- Wedges are contoured to fit the pipe
- All sizes pressure tested to twice the listed pressure rating
- Gland, screws and wedges are black e-coated

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



#### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

02/03/23

Submitted By: