



SUBMITTAL INFORMATION

Uni-Flange® Series Casing Spacers - (UFRCS1390-C-x-U)



CASING SPACERS FOR SUPPORT OF C900 PVC PIPE SIZE 4", 6" AND 8" WITH PIPE BELL JOINT RESTRAINT

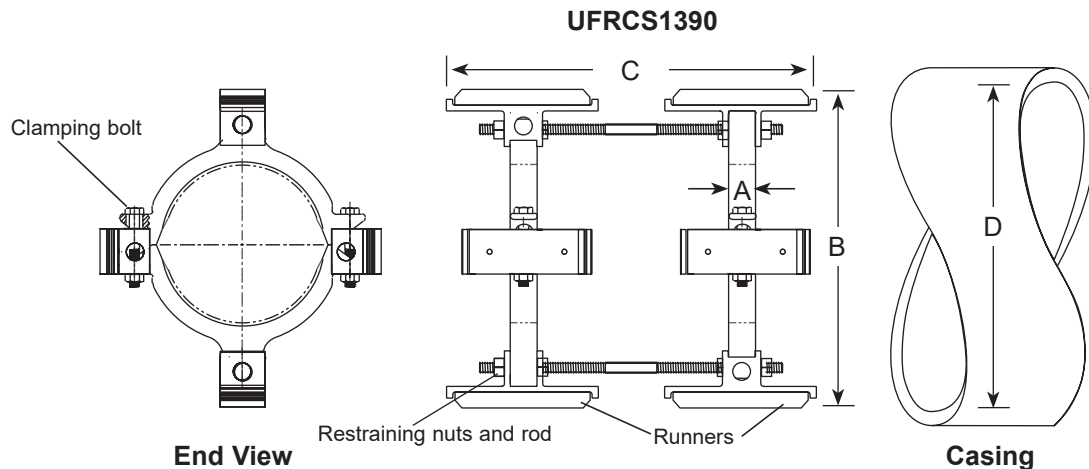

RESTRAINED CASING SPACER FOR PIPE BELL JOINT - UFRCS1390

NOM. PIPE SIZE	ACTUAL PIPE O.D.	CATALOG NUMBER	APPROX. SHIPPING WEIGHT	A	B (APPROX.)	C (APPROX.)	D MIN. CASING SIZE (ID)	RUNNER QTY.	✓ SUBMITTED ITEMS
*4"	4.80"	UFRCS1390-C-4-U	34.5	1-1/8"	11-3/4"	12"	12.4"	8	
*6"	6.90"	UFRCS1390-C-6-U	37.2	1-1/8"	13-3/8"	13"	14"	8	
*8"	9.05"	UFRCS1390-C-8-U	48.1	1-1/8"	17-1/8"	15"	17.8"	8	

* Suitable for use on ductile iron pipe at a reduced pressure rating.

FEATURES

- High strength ductile iron, ASTM A53, 65,000 psi tensile strength, 45,000 psi yield strength, 12% elongation capability. (Grade 65-45-12)
- Restraining rods/nuts - High strength, low alloy ASTM A242, ANSI/AWWA C111/A21.11
- Clamping bolts/nuts - SAEJ 429, grade 5
- Runners - Ultra high molecular weight polymer
 - Coefficient of friction .10 ASTM D-1894
 - Tensile impact 600-1200 ft. lbs. / in²
 - Dielectric constant 2.3 ASTM D-150
- 4"-8" sizes - Runners installed on tie rod ears and clamping bolt pads

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

09/06/23

Submitted By: