



SUBMITTAL INFORMATION

Uni-Flange® Series Casing Spacers - (UFRCS1390-C-xx-U style)



CASING SPACERS FOR SUPPORT OF C900 PVC 14" THROUGH 24"
WITH PIPE BELL JOINT RESTRAINT

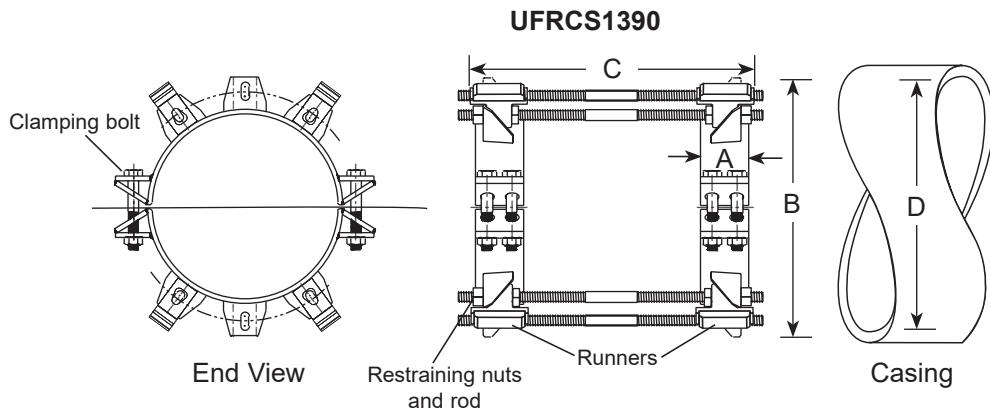

RESTRAINED CASING SPACER FOR PIPE BELL JOINT - UFRCS1390

NOM. PIPE SIZE	ACTUAL PIPE O.D.	CATALOG NUMBER	APPROX. SHIPPING WEIGHT	A	B (APPROX.)	C (APPROX.)	D MIN. CASING SIZE (ID)	RUNNER QTY.	✓ SUBMITTED ITEMS
*14"	15.30"	UFRCS1390-C-14-U	146.3	4"	26-3/8"	30"	27"	8	
*16"	17.40"	UFRCS1390-C-16-U	156.2	4"	28-3/8"	30"	30"	8	
18"	19.50"	UFRCS1390-C-18-U	206.2	5"	30-1/2"	30"	31"	8	
20"	21.6"	UFRCS1390-C-20-U	265.2	7"	32-1/4"	30"	33"	8	
24"	25.8"	UFRCS1390-C-24-U	313.6	7"	38-1/4"	30"	39"	8	

* Suitable for use on ductile iron pipe at a reduced pressure rating.

FEATURES

- Ductile iron, ASTM A536, 65,000 psi tensile strength, 45,000 psi yield strength, 12% elongation capability. (Grade 65-45-12)
- Restraining rods/nuts - High strength, low alloy ASTM A242, ANSI/AWWA C111/A21.11
- Clamping bolts/nuts - SAEJ 429, grade 5
- Runners Ultra high molecular weight polymer
Coefficient of friction .10 ASTM D-1894
- 14"-24" sizes - Runners installed on tie rod ears

Tensile impact 600-1200 ft. lbs. / in²
Dielectric constant 2.3 ASTM D-150

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By:

09/07/23