

## SUBMITTAL INFORMATION

Uni-Flange® Series Casing Spacers - (UFRCS1390-C-xx-X-I style)



CASING SPACERS FOR SUPPORT OF C900 PVC 14" THROUGH 24"
WITH PIPE BELL JOINT RESTRAINT WITH 304 STAINLESS STEEL HARDWARE

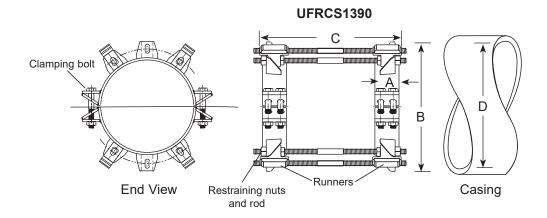

## **RESTRAINED CASING SPACER FOR PIPE BELL JOINT - UFRCS1390**

Nom. PIPE SIZE	ACTUAL PIPE O.D.	Catalog Number	APPROX. SHIPPING WEIGHT	A	B (Approx.)	C (Approx.)	D Min. Casing Size (ID)	RUNNER QTY.	✓ SUBMITTED ITEMS
*14"	15.30"	UFRCS1390-C-14-X-I	146.28	4"	26-3/8"	30"	27"	8	
*16"	17.40"	UFRCS1390-C-16-X-I	156.2	4"	28-3/8"	30"	30"	8	
18"	19.50"	UFRCS1390-C-18-X-I	206.2	5"	30-1/2"	30"	31"	8	
20"	21.6"	UFRCS1390-C-20-X-I	265.2	7"	32-1/4"	30"	33"	8	
24"	25.8"	UFRCS1390-C-24-X-I	313.6	7"	38-1/4"	30"	39"	8	

<sup>\*</sup> Suitable for use on ductile iron pipe at a reduced pressure rating.

## **FEATURES**

- Ductile iron, ASTM A536, 65,000 psi tensile strength, 45,000 psi yield strength, 12% elongation capability. (Grade 65-45-12)
- Restraining rods/nuts Type 304 stainless steel
- Clamping bolts/nuts Type 304 stainless steel
- Runners Ultra high molecular weight polymer
  - Coefficient of friction .10 ASTM D-1894
  - Coefficient of inction . To ASTM D-109
- Tensile impact 600-1200 ft. lbs. / in<sup>2</sup>
- Dielectric constant 2.3 ASTM D-150

14"-24" sizes - Runners installed on tie rod ears

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



## The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com 09

Submitted By:

09/07/23	