



SUBMITTAL INFORMATION

Uni-Flange® Restraint with Casing Spacers - (UFRC1390-P-15-I style)



RESTRAINED CASING SPACER FOR GRAVITY SEWER PIPE BELL JOINT

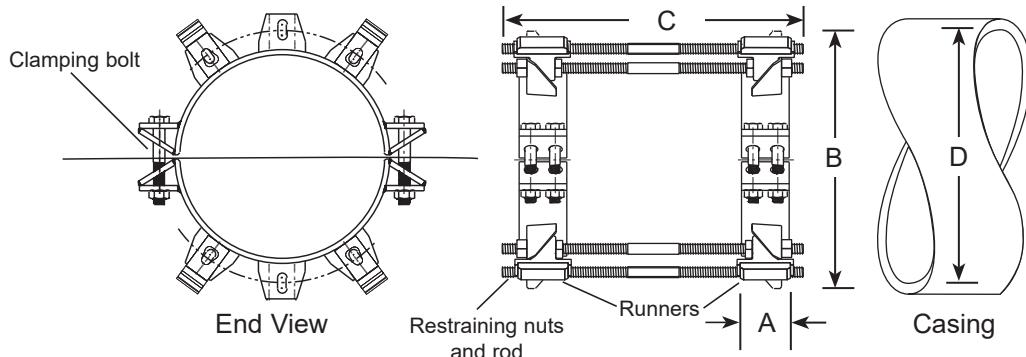

NOM. PIPE SIZE	ACTUAL PIPE O.D. (IN.)	CATALOG NUMBER	A	B (APPROX.)	C (APPROX.)	D MIN. CASING SIZE (ID)	RUNNER QTY.	APPROX. SHIPPING WEIGHT LBS.
15"	15.30"	UFRC1390-P-15-I	4"	26-3/8"	30"	27"	8	132

*Contact factory for larger sizes. Exact pipe & bell OD are required.

Note: Although 6 ears are shown, only 4 rods will be supplied / necessary.

FEATURES

- Carbon steel per ASTM A36
- Restraining rods/nuts - High strength, low alloy ASTM A242, ANSI/AWWA C111/A21.11
- Clamping bolts/nuts - SAE J429, grade 5
- Runners - Ultra high molecular weight polymer Tensile impact 600-1200 ft. lbs. / in²
Coefficient of friction .10 ASTM D-1894 Dielectric constant 2.3 ASTM D-150
- Runners installed on tie rod ears.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By:

05/09/22