



SUBMITTAL INFORMATION

Uni-Flange® Restraint with Casing Spacers - (UFRCS1390-P-xx-I style)



RESTRAINED CASING SPACER FOR GRAVITY SEWER PIPE BELL JOINT

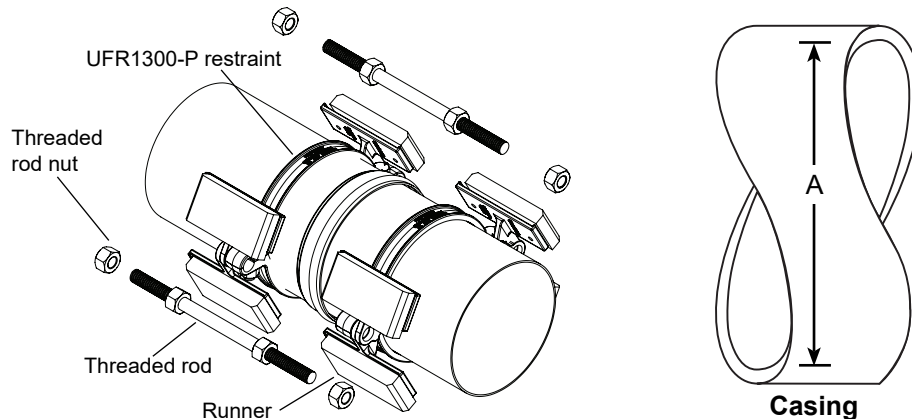

NOM. PIPE SIZE	CATALOG NUMBER	ACTUAL PIPE O.D. (IN.)	APPROX. SHIPPING WEIGHT LBS.	A MIN. CASING SIZE (ID)	RUNNER QTY.	✓ SUBMITTED ITEMS
4"	UFRCS1390-P-4-I	4.22	23.0	10-1/2"	8	
6"	UFRCS1390-P-6-I	6.28	24.0	12-1/8"	8	
8"	UFRCS1390-P-8-I	8.40	26.0	14-1/2"	8	
10"	UFRCS1390-P-10-I	10.50	30.0	16-3/4"	8	
12"	UFRCS1390-P-12-I	12.50	32.5	19-1/8"	8	

FEATURES

- High strength ductile iron, ASTM A53, 65,000 psi tensile strength, 45,000 psi yield strength, 12% elongation capability. (Grade 65-45-12)
- Restraining rods/nuts: High strength, low alloy ASTM A242, ANSI/AWWA C111
- Clamping bolts / nuts: SAE J429, grade 5
- Runners: - Ultra high molecular weight polymer - Tensile impact 600-1200 ft. lbs. / in²
- Coefficient of friction .10 ASTM D-1894 - Dielectric constant 2.3 ASTM D-150
- 50 psi rated working pressure with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

04/21/20

Submitted By: