

SUBMITTAL INFORMATION

Uni-Flange® Restraint with Casing Spacers - (UFRCS1390-P-xx-U style)



RESTRAINED CASING SPACER FOR GRAVITY SEWER PIPE BELL JOINT

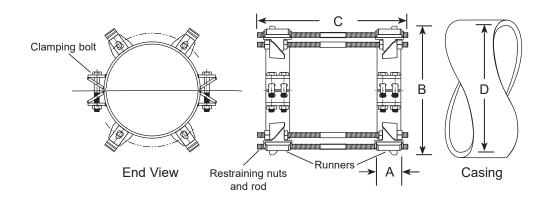

Nom. PIPE SIZE	ACTUAL PIPE O.D.	CATALOG Number	Α	B (Approx.)	C (Approx.)	D Min.Casing Size (ID)	RUNNER QTY.	APPROX. SHIPPING WEIGHT
15"	15.30"	UFRCS1390-P-15-U	4"	24-7/8"	30"	26"	8	132
18"	18.70"	UFRCS1390-P-18-U	4"	28-9/16"	30"	30"	8	156
21"	22.05"	UFRCS1390-P-21-U	4"	31-3/16"	36"	32"	8	169
24"	24.80"	UFRCS1390-P-24-U	4"	34-9/16"	36"	36"	8	185
27"	27.95"	UFRCS1390-P-27-U	4"	38-1/16"	36"	38-1/2"	8	202

^{*}Contact factory for larger sizes. Exact pipe & bell OD are required.

FEATURES

- Carbon steel per ASTM A36
- Restraining rods/nuts High strength, low alloy ASTM A242, ANSI/AWWA C111/A21.11
- Clamping bolts/nuts SAE J429, grade 5
- Runners Ultra high molecular weight polymer
 Coefficient of friction .10 ASTM D-1894
 Temperature range -220° F. to +1800° F. continuous service
- Runners installed on tie rod ears.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

05/09/22

	nitte	