



SUBMITTAL INFORMATION

Uni-Flange® Restraint with Casing Spacers - (UFRCS1390-P-xx-X-U style)



RESTRAINED CASING SPACER (WITH TYPE 304 STAINLESS STEEL HARDWARE) FOR GRAVITY SEWER PIPE BELL JOINT

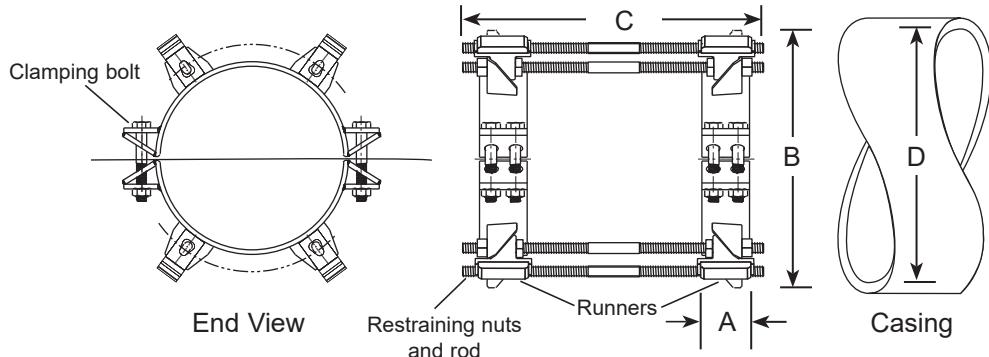

NOM. PIPE SIZE	ACTUAL PIPE O.D.	CATALOG NUMBER	A	B (APPROX.)	C (APPROX.)	D MIN. CASING SIZE (ID)	RUNNER QTY.	APPROX. SHIPPING WEIGHT LBS.
15"	15.30"	UFRCS1390-P-15-X-U	4"	24-7/8"	30"	26"	8	132
18"	18.70"	UFRCS1390-P-18-X-U	4"	28-9/16"	30"	30"	8	156
21"	22.05"	UFRCS1390-P-21-X-U	4"	31-3/16"	36"	32"	8	169
24"	24.80"	UFRCS1390-P-24-X-U	4"	34-9/16"	36"	36"	8	185

FEATURES

- Carbon steel per ASTM A36
- Restraining rods/nuts - Type 304 stainless steel per ASTM A193 and ASTM A194
- Clamping bolts/nuts - Type 304 stainless steel per ASTM A193 and ASTM A194
- Runners - Ultra high molecular weight polymer Tensile impact 600-1200 ft. lbs. / in²
Coefficient of friction .10 ASTM D-1894 Dielectric constant 2.3 ASTM D-150
- Runners installed on tie rod ears.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By:

05/09/22