



SUBMITTAL INFORMATION

Key Valve Branch Assembly - (UV43-44W-14-AWT-G-NL style)



GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY TWO METER SWIVEL NUT OUTLETS, ASSEMBLED WATERTIGHT

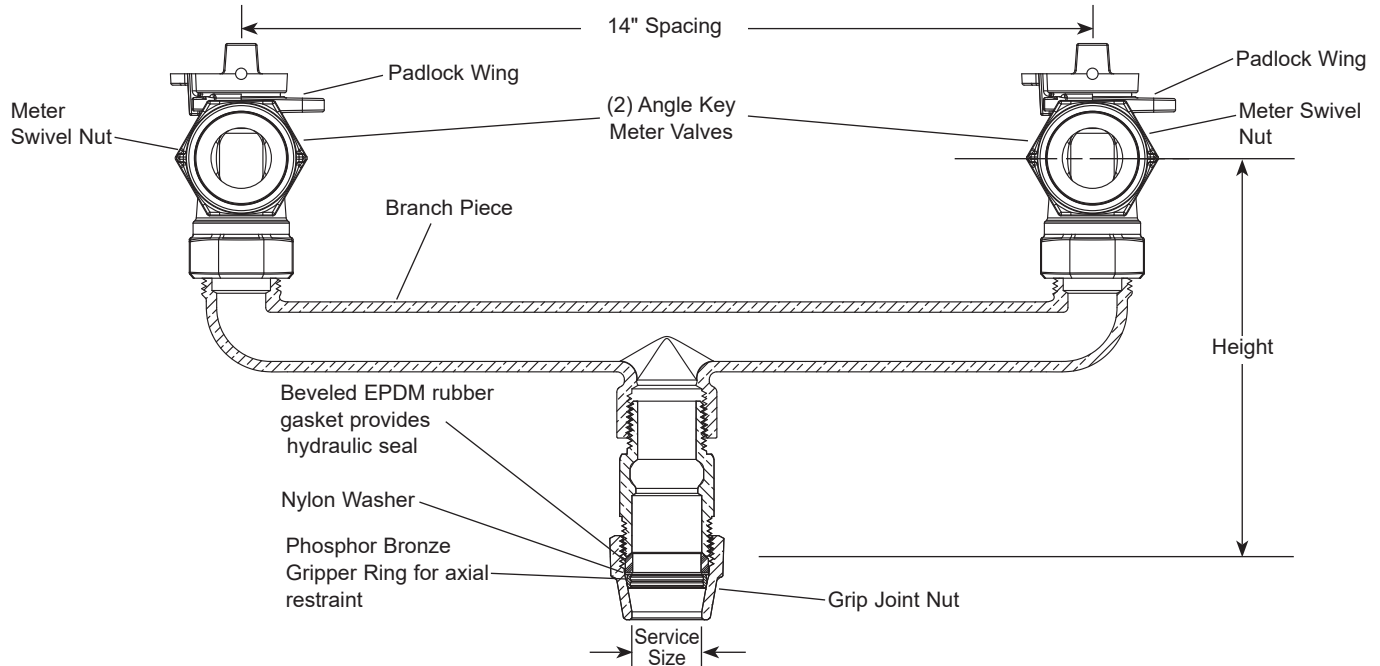

SERVICE SIZE	METER SIZE	HEIGHT	APPROX. WT. LBS.	COMPONENTS			ASSEMBLY CATALOG NUMBER	✓ SUBMITTED ITEM(S)
				BRANCH PIECE	COUPLING	VALVES (2)		
1"	1"	6-9/16"	7.5	U18-44-14-NL	C84-44-G-NL	KV13-444W-NL	UV43-44W-14-AWT-G-NL	

Note: Ford recommends using insert stiffeners with plastic pipe and tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- All Branch Valve Assemblies have padlock wings
- Meter gaskets are furnished with all branch valve assemblies
- Meets 100 PSI pressure requirements of AWWA Standard C800
- Conforms to AWWA C700 for meter threads
- Ends are integral or secured with adhesive to prevent unintentional disassembly

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

05/06/24

Submitted By: