



SUBMITTAL INFORMATION

73-83 Series Coppersetter - (VBB73-83-12W-41-33-FP-QNL style)



FULL PORT ANGLE BALL VALVE BY FULL PORT ANGLE BALL VALVE (3/4" METER)

QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY DOUBLE PURPOSE UNION SWIVEL OUTLET

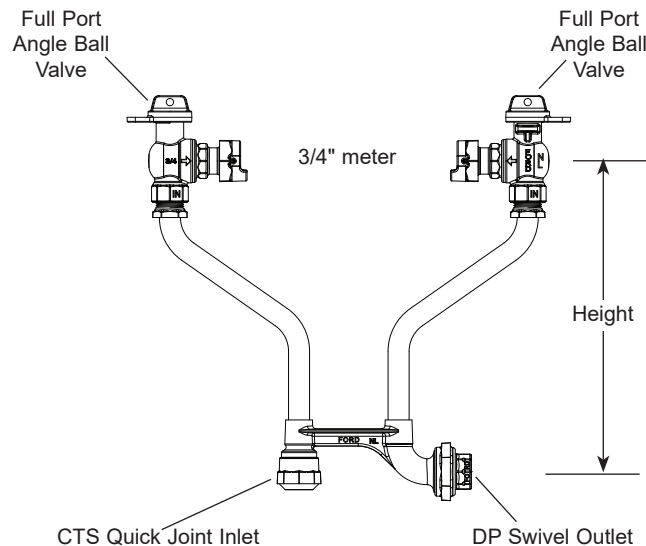

INLET	OUTLET	APPROX. WT. LBS.	APPROX. HEIGHT	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
3/4" (CTS) Q.J.	3/4" D.P. Swivel	7.2	12"	VBB73-83-12W-41-33-FP-QNL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- Saddle nuts hold the meter in place for tightening
- 15/16" copper risers provide more flow capacity
- The directional angle ball valve shall be rated at 150 psi when used as a customer shut-off on the outlet side of the meter
- Dual purpose union swivels will accommodate male iron pipe threads or flare copper

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

02/10/23

Submitted By: