

SUBMITTAL INFORMATION





FLANGED BALL VALVE BY FLANGED BALL VALVE WITH HIGH BY-PASS (1-1/2" METER)

FEMALE IRON PIPE THREAD VERTICAL INLET AND OUTLET

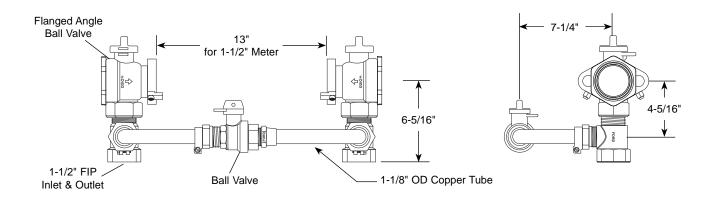

SERVICE LINE CONNECTION		APPROX.	CATALOG	✓ SUBMITTED
FIP INLET	FIP OUTLET	WT. LBS.	Number	ITEM(S)
1-1/2"	1-1/2"	27.0	VBB86-5HB-11-66-NL	

FEATURES

- All brass components that come in contact with potable water conform to AWWA Standard C800 (UNS NO C89833)
- The product has the letters "NL" cast into the main body for proper identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Constructed with Type K Copper and conforms to ASTM B-88, Copper Alloy #122
- All Ford Meter Setters are assembled with Lead-Free Solder
- Meter Support Brackets are standard
- · Padlock Wing is standard on all Flanged Meter Ball Valves
- 1" Full port by-pass ball valve
- Outlet ball valve may be used as customer shut-off up to 300 PSI

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

http://www.fordmeterbox.com

Submitted By:

01/28/14