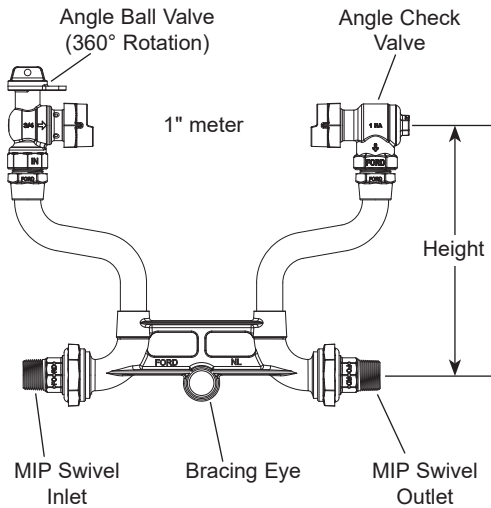# SUBMITTAL INFORMATION

70 Series Coppersetter - *(VBH74-xxWR-88-44-NL style)*
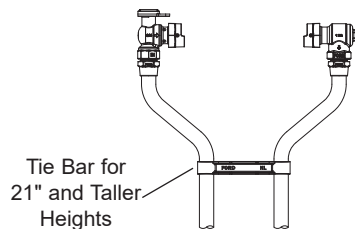

ANGLE BALL VALVE BY ANGLE CHECK VALVE (1" METER)

MALE IRON PIPE SWIVEL INLET AND OUTLET

Angle Ball Valve (360° Rotation)
Angle Check Valve
1" meter
Height
MIP Swivel Inlet
Bracing Eye
MIP Swivel Outlet

Coppersetter Part Number

Height (Inches)	Approx. Wt. Lbs.	Catalog Number	✓ Submitted Item(s)
10	10.0	VBH74-10WR-88-44-NL	
12	10.3	VBH74-12WR-88-44-NL	
15	11.3	VBH74-15WR-88-44-NL	
18	11.7	VBH74-18WR-88-44-NL	
21	13.0	VBH74-21WR-88-44-NL	
24	13.3	VBH74-24WR-88-44-NL	
27	13.9	VBH74-27WR-88-44-NL	
30	14.0	VBH74-30WR-88-44-NL	
33	14.1	VBH74-33WR-88-44-NL	
36	14.5	VBH74-36WR-88-44-NL	
39	14.9	VBH74-39WR-88-44-NL	
42	15.2	VBH74-42WR-88-44-NL	

Tie Bar for 21" and Taller Heights

Service Line Size

Inlet	Outlet
1" MIP Swivel	1" MIP Swivel

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Certified to NSF/ANSI/CAN Standard 61 and NSF/ANSI/CAN Standard 372 where applicable
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- Bracing eye is standard on all 70 Series Coppersetters
- Tie bar is standard for 21" and taller Coppersetter heights (74 Series)
- 1-1/8" copper risers provide more flow capacity
- Ball valve has 360° tee-head rotation

07/22/25

Submitted By: