


SUBMITTAL INFORMATION





ANGLE BALL VALVE BY ANGLE CHECK VALVE (1-1/2" METER)

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

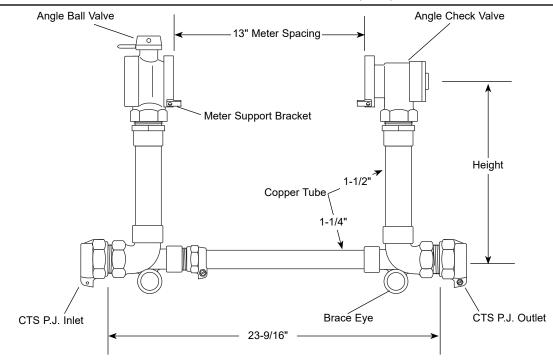

SERVICE LINE CONNECTION			Approx.	Come on Newson	✓ SUBMITTED
CTS PJN INLET	CTS PJN OUTLET	HEIGHT	Wt. Lbs.	CATALOG NUMBER	ITEM(S)
1-1/2"	1-1/2"	12"	30	VBH76-12-44-66-NL	
		15"	31	VBH76-15-44-66-NL	
		18"	32	VBH76-18-44-66-NL	
		21"	32	VBH76-21-44-66-NL	
		24"	33	VBH76-24-44-66-NL	
		27"	33	VBH76-27-44-66-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- · All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Constructed with Type K Copper and conforms to ASTM B88, UNS C12200
- Bracing eyes are standard
- Meter support brackets are standard
- All Ford Meter Setters are assembled with lead-free solder
- Padlock wing is standard on all Angle Meter Ball Valves or Key Valves

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

09/	12/	16