

# SUBMITTAL INFORMATION





## ANGLE BALL VALVE BY ANGLE CHECK VALVE (2" METER)

### PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

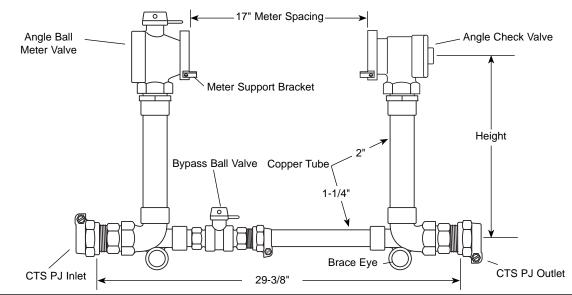

SERVICE LINE CONNECTION		Uriour	Approx.	Cara on Names	✓ SUBMITTED
CTS PJ INLET	CTS PJ OUTLET	HEIGHT	Wt. Lbs.	CATALOG NUMBER	ITEM(S)
2"	2"	12"	32	VBH77-12B-44-77-NL	
		15"	33	VBH77-15B-44-77-NL	
		18"	34	VBH77-18B-44-77-NL	
		21"	34	VBH77-21B-44-77-NL	
		24"	35	VBH77-24B-44-77-NL	
		27"	35	VBH77-27B-44-77-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

## **FEATURES**

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS NO C89833)
- The product has the letters "NL" cast into the main body for proper identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Constructed with Type K Copper and conforms to ASTM B-88, Copper Alloy #122
- All Ford Meter Setters are assembled with lead-free solder
- Bracing Eves are standard
- Meter Support Brackets are standard
- Optional High Bypass add "HB" following the height. Example: VBH77-12HB-44-77-NL
- Padlock wing is standard on all Angle Meter Ball Valves or Key Valves

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



# The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 http://www.fordmeterbox.com

12/17/13

Submitted B	y
-------------	---