



# SUBMITTAL INFORMATION

## 70 Series Coppersetter - (VBHC72-xxSB1-44-xx-Q-NL style)



### LOCKING ANGLE BALL VALVE BY ANGLE CARTRIDGE DUAL CHECK VALVE (5/8" X 3/4" METER)

#### QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

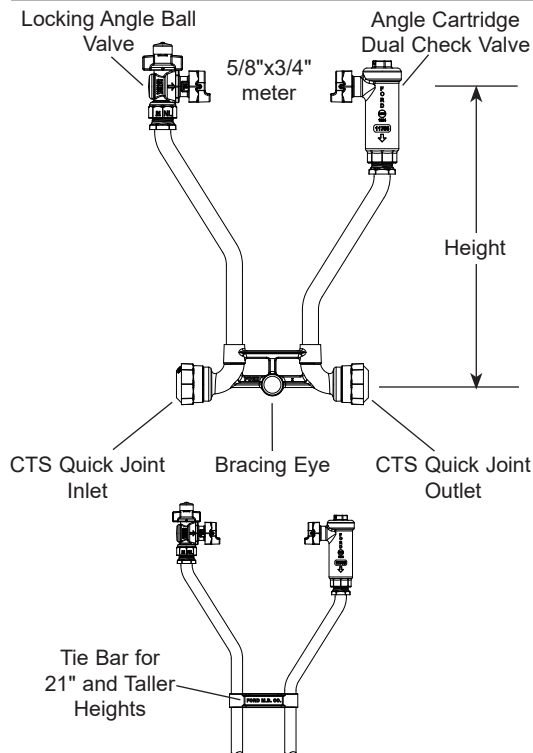

#### Coppersetter Part Number

HEIGHT (INCHES)	APPROX. WT. LBS.	CATALOG NUMBER (INSERT SERVICE LINE CONN. SIZE)	✓ SUBMITTED ITEM(S)
9	6.3	VBHC72-9SB1-44-xx-Q-NL	
12	6.5	VBHC72-12SB1-44-xx-Q-NL	
15	6.7	VBHC72-15SB1-44-xx-Q-NL	
18	7.4	VBHC72-18SB1-44-xx-Q-NL	
21	7.6	VBHC72-21SB1-44-xx-Q-NL	
24	7.9	VBHC72-24SB1-44-xx-Q-NL	
27	8.1	VBHC72-27SB1-44-xx-Q-NL	
30	8.4	VBHC72-30SB1-44-xx-Q-NL	
33	8.7	VBHC72-33SB1-44-xx-Q-NL	
36	8.9	VBHC72-36SB1-44-xx-Q-NL	
39	9.2	VBHC72-39SB1-44-xx-Q-NL	
42	9.5	VBHC72-42SB1-44-xx-Q-NL	

#### Service Line Size

INLET	OUTLET	SERVICE LINE CONN.	✓ SUBMITTED ITEM(S)
3/4" (CTS) Q.J.	3/4" (CTS) Q.J.	33	
1" (CTS) Q.J.	1" (CTS) Q.J.	44	

**Note:** Ford recommends using insert stiffeners with plastic pipe or tubing

#### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
  - The product has the letters "NL" cast into the main body for lead-free identification
  - Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
  - Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
  - Copper conforms to ASTM B75 or B88, UNS C12200
  - All Ford® Setters are assembled with lead-free solder
  - Saddle nuts hold the meter in place for tightening
  - Bracing eye is standard on all 70 Series Coppersetters
  - Tie bar is standard for 21" and taller Coppersetter heights (VBHC72 Series)
  - 13/16" copper risers provide more flow capacity
  - ASSE 1024 approved dual check valve
  - Secura-Lok™ locking inlet valve allows for locking in the open, closed or operational position.
- Note:** KEY-234-SLB required (order separately)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

03/02/22

Submitted By: