

SUBMITTAL INFORMATION





ANGLE BALL VALVE BY ANGLE DUAL CHECK VALVE WITH TEST PORT (1-1/2" METER)

FEMALE IRON PIPE THREAD INLET AND OUTLET

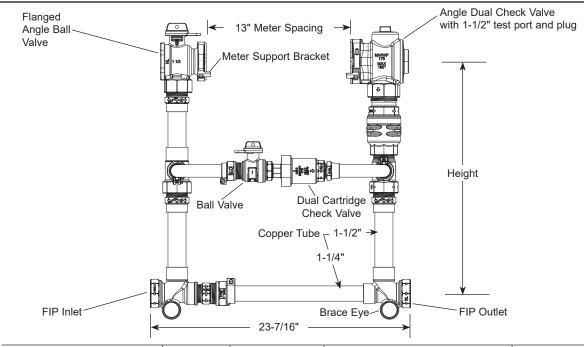

SERVICE LINE CONNECTION			APPROX.		✓ SUBMITTED
FIP INLET	FIP OUTLET	НЕІВНТ	Wt. Lbs.	CATALOG NUMBER	ITEM(S)
1-1/2"	1-1/2"	21"	44	VBHH76-21HBHC-11-66-TP6NL	
		24"	45	VBHH76-24HBHC-11-66-TP6NL	
		27"	45	VBHH76-27HBHC-11-66-TP6NL	
		36"	50	VBHH76-36HBHC-11-66-TP6NL	

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Certified to NSF/ANSI/CAN Standard 61 and NSF/ANSI/CAN Standard 372 where applicable
- Copper conforms to ASTM B75 or B88, UNS C12200
- All Ford® Setters are assembled with lead-free solder
- · Bracing eyes are standard
- Meter support brackets are standard
- Padlock wing is standard on all Angle Meter Ball Valves and Key Valves
- High by-pass bar offers easy access to by-pass Ball Valve
- 1-1/2" test port is provided on ASSE 1024 approved dual check valve

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.

10/29/24



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:			