

SUBMITTAL INFORMATION





ANGLE KEY VALVE BY DUAL CHECK VALVE
WITH DUAL CHECK VALVE IN HIGH BY-PASS (2" METER)

FEMALE IRON PIPE THREAD INLET AND OUTLET

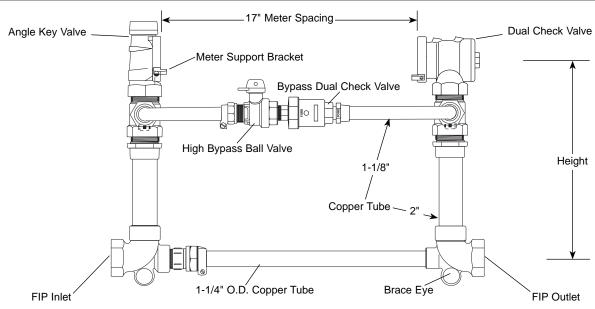

SERVICE LINE CONNECTION		HEIGHT	APPROX.	CATALOG NUMBER	✓ SUBMITTED
FIP INLET	FIP OUTLET	HEIGHT	WT. LBS.	CATALOG NUMBER	ITEM(S)
	2"	12"	37	VHH77-12HBHC-11-77-NL	
2"		15"	38	VHH77-15HBHC-11-77-NL	
		18"	39	VHH77-18HBHC-11-77-NL	
		21"	40	VHH77-21HBHC-11-77-NL	
		24"	41	VHH77-24HBHC-11-77-NL	
		27"	42	VHH77-27HBHC-11-77-NL	

FEATURES

- All brass components that come in contact with potable water conform to AWWA Standard C800 (UNS NO C89833)
- The product has the letters "NL" cast into the main body for proper identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Dual Check Valve is ASSE 1024 approved
- Constructed with Type K Copper, and conforms to ASTM B-88, Copper Alloy #122
- All Ford Meter Setters are assembled with Lead-Free Solder
- Bracing Eyes are standard
- Meter Support Brackets are standard
- Padlock Wing is standard on all Angle Meter Ball Valves or Key Valves

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487 Overseas Fax: 260-563-0167

http://www.fordmeterbox.com 01/02/14

Su	bm	itte	d	By: