

SUBMITTAL INFORMATION





FLANGED ANGLE KEY VALVE BY FLANGED ANGLE DUAL CHECK VALVE WITH BY-PASS (2" METER)

FEMALE IRON PIPE THREAD VERTICAL INLET AND OUTLET

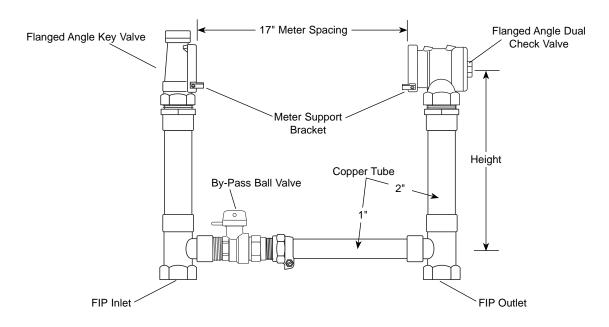

SERVICE LINE CONNECTION		Неіднт	APPROX.	CATALOG	√ SUBMITTED
FIP INLET	FIP OUTLET	HEIGHT	Wt. Lbs.	Number	ITEM(S)
2"	2"	12"	37.0	VHH87-12B-11-77-NL	
		15"	38.0	VHH87-15B-11-77-NL	
		18"	39.0	VHH87-18B-11-77-NL	
		21"	41.0	VHH87-21B-11-77-NL	
		24"	42.0	VHH87-24B-11-77-NL	
		27"	43.0	VHH87-27B-11-77-NL	

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Constructed with Type K Copper and conforms to ASTM B88, UNS C12200
- All Ford Meter Setters are assembled with lead-free solder
- · Meter support brackets are standard
- Padlock wing is standard on all angle meter ball valves or key valves
- ASSE 1024 approved dual check valve

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

02/09/15

Submitted	Ву