



SUBMITTAL INFORMATION

90 Series Coppersetter - (VHH91-xxW-44-33x-G-NL style)

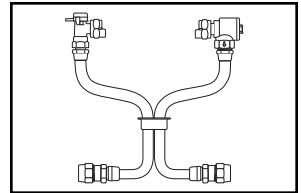


ANGLE KEY VALVE BY ANGLE DUAL CHECK VALVE (5/8" METER)

GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

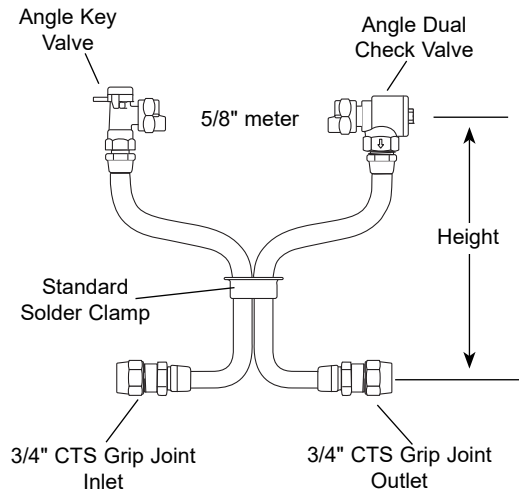

Options

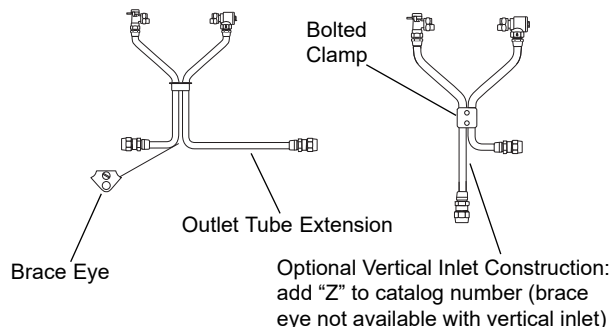

Coppersetter Part Number

HEIGHT (INCHES)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
12	6.6	VHH91-12W-44-33x-G-NL	
15	7.4	VHH91-15W-44-33x-G-NL	
18	7.8	VHH91-18W-44-33x-G-NL	
21	8.1	VHH91-21W-44-33x-G-NL	
24	8.4	VHH91-24W-44-33x-G-NL	
27	8.7	VHH91-27W-44-33x-G-NL	
30	9.1	VHH91-30W-44-33x-G-NL	
33	9.4	VHH91-33W-44-33x-G-NL	
36	9.7	VHH91-36W-44-33x-G-NL	

x = Add option code to catalog number if required. See tables below.

Option Codes for 90 Series Coppersetters

OPTION	EXTENSION TO CATALOG NUMBER
Brace Eye	Add "E" to Cat. No.
Bolted Clamp Construction	Add "C" to Cat. No.
15" outlet tube extension	Add "A" to Cat. No.
15" outlet tube extension & brace eye	Add "H" to Cat. No.
15" outlet tube extension & bolted clamp	Add "F" to Cat. No.
18" outlet tube extension	Add "B" to Cat. No.
18" outlet tube extension & brace eye	Add "K" to Cat. No.
18" outlet tube extension & bolted clamp	Add "J" to Cat. No.

Add extension to catalog number. Example: VHH91-21W-44-33E-G-NL

Inlet Tube Options for 90 Series Coppersetters

OPTION	COPPERSETTER SIZE	INLET TUBE OPTION CODE
15" inlet tube extension	5/8"	Add "P" to Cat. No.
18" inlet tube extension	5/8"	Add "S" to Cat. No.
Vertical inlet extension	5/8"	Add "Z" to Cat. No.

Place catalog inlet tube code to the left of any other extension option from the top option table. Example: VHH91-21W-44-33ZA-G-NL

Service Line Size

INLET	OUTLET
3/4" CTS Grip Joint	3/4" CTS Grip Joint

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Copper conforms to ASTM B75 or B88, UNS C12200
- Saddle nuts hold the meter in place for tightening
- Brace eye is optional for all 90 Series Coppersetters with standard solder clamp
- 13/16" copper risers provide more flow capacity
- Outlet tube extension and bolted clamp construction are optional on 90 Series
- All Ford® Setters are assembled with lead-free solder
- ASSE 1024 approved dual check valve

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/18/18

Submitted By: