


SUBMITTAL INFORMATION

Repair Clamps - (F3-xxxx-Length style)



THREE SECTION STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS

Band
Type 304
stainless steel

Gasket
Gridded Virgin SBR compounded for
water service, per ASTM D2000. NBR
(Buna-N) and EPDM are optional.


Armors
Heavy gauge type 304 stainless steel, are
mold bonded into the gasket to ensure
uniform compression against the pipe.

Nuts and Bolts
High strength, low alloy
steel per ASTM A242
and AWWA C111/A21.11

Nuts are fluorocarbon
coated

Optional
304 Stainless steel bolts
and nuts

Lugs
Ductile Iron per ASTM A536
Finish: E-coat epoxy
Note: Lug set on two sides
of clamp will be closed style.
Lug set on other side will
consist of one open and one
closed style.

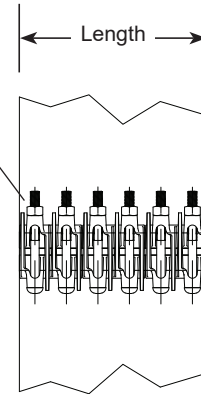

PIPE O.D. RANGE (IN.)	LENGTH (IN.) AND APPROX. WT. (LBS.)				BOLT SIZE (IN.)	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
	10	15	20	30				
17.00-18.20	47	75	101	175	5/8 x 6-1/2	20 GA	F3-1820-Length	
18.00-19.20	48	76	102	176			F3-1920-Length	
24.80-26.00	56	84	111	185			F3-2600-Length	
33.87-35.07	68	102	130	195			F3-3507-Length	
Number of Bolts	12	18	24	36				

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Removable lugs
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/23/24

Submitted By: