



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FAST-xxxx-x-MJ-U100 style)



STAINLESS STEEL TAPPING SLEEVE WITH MECHANICAL JOINT OUTLET

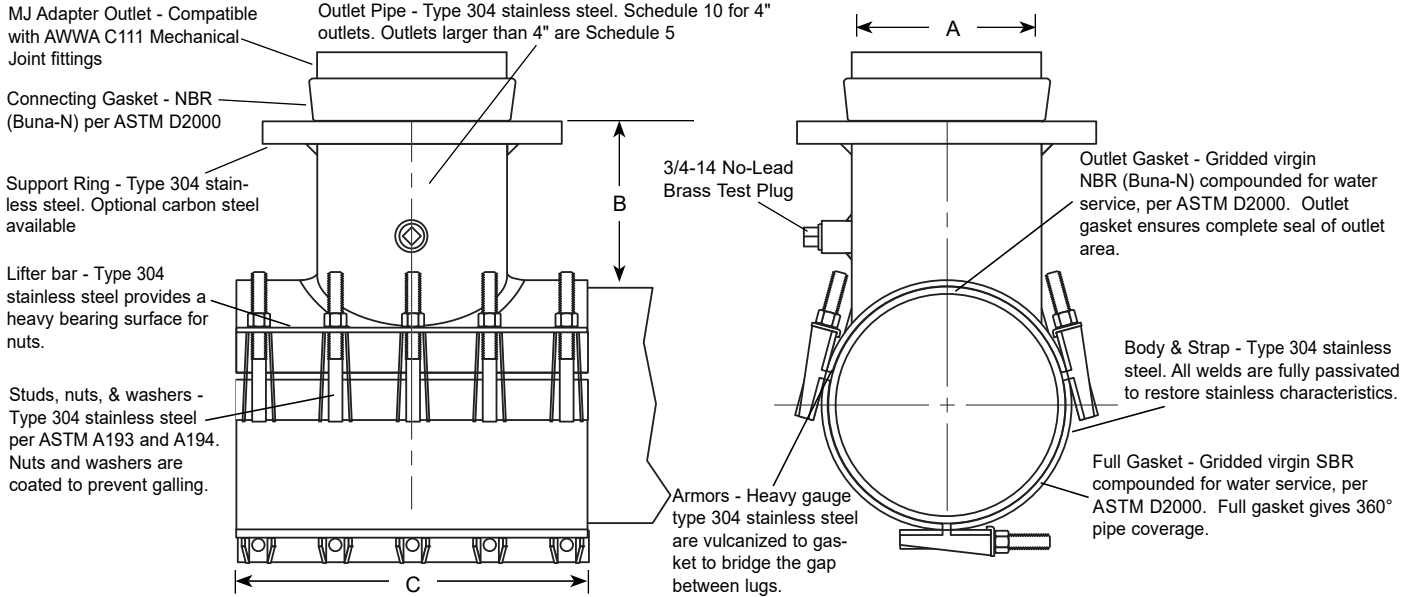

NOM. PIPE SIZE	SLEEVE O.D. RANGE	CATALOG NUMBER**	BY	SS ** OUTLET SIZE/ CODE	APPROX. Wt.	NOM. DIM. - INCHES			SADDLE THICKNESS (GAUGE)	STRAP THICKNESS (GAUGE)	STUD SIZE	No. STUDS	WORKING PRESSURE (PSI)	✓ SUBMITTED ITEM(S)
						A	B	C						
16"	17.30 - 17.70	FAST-1770-x-MJ-U100		4	75	4-1/4	5-3/16	16	.105" (12)	.060" (16)	5/8"	15	200	
	17.40 - 17.80	FAST-1780-x-MJ-U100		6	79	6-13/32	5-1/2	16				15		
	17.75 - 18.15	FAST-1815-x-MJ-U100		8	100	8-13/32	5-5/8	20				15		
	18.15 - 18.62	FAST-1862-x-MJ-U100		10	105	10-31/64	6-1/8	20				15		
	18.60 - 19.00	FAST-1900-x-MJ-U100		12	141	12-27/64	6-1/4	24				15		
	18.80 - 19.20	FAST-1920-x-MJ-U100		4	77	4-1/4	5-3/16	16				15		
18"	19.30 - 19.70	FAST-1970-x-MJ-U100		6	81	6-13/32	5-1/2	16	.105" (12)	.060" (16)	5/8"	15	175	
	19.50 - 19.92	FAST-1992-x-MJ-U100		8	103	8-13/32	5-5/8	20				18		
	19.80 - 20.20	FAST-2020-x-MJ-U100		10	108	10-31/64	6-1/8	20				18		
				12	144	12-27/64	6-1/4	24				21		
				4	87	4-1/4	5-3/16	16				15		
20"	20.20 - 20.60	FAST-2060-x-MJ-U100		6	91	6-13/32	5-1/2	16	.105" (12)	.060" (16)	5/8"	15	175	
	20.90 - 21.30	FAST-2130-x-MJ-U100		8	115	8-13/32	5-5/8	20				18		
	21.40 - 21.80	FAST-2180-x-MJ-U100		10	120	10-31/64	6-1/8	20				18		
	21.86 - 22.26	FAST-2226-x-MJ-U100		12	158	12-27/64	6-1/4	24				21		
	22.30 - 22.70	FAST-2270-x-MJ-U100		4	75	4-1/4	5-3/16	16				15		
	23.40 - 23.80	FAST-2380-x-MJ-U100		6	79	6-13/32	5-1/2	16				15		
24"	23.80-24.20	FAST-2420-x-MJ-U100		8	100	8-13/32	5-5/8	20	.105" (12)	.060" (16)	5/8"	18	150	
	25.60-26.00	FAST-2600-x-MJ-U100		10	105	10-31/64	6-1/8	20				18		
				12	141	12-27/64	6-1/4	24				21		
				4	75	4-1/4	5-3/16	16				15		
				6	79	6-13/32	5-1/2	16				15		

Highlighted ranges are recommended for ductile iron pipe and C905 PVC applications.

** To order: Add flanged outlet size to catalog number. Example: The complete FAST catalog number for an 20" pipe (21.60 O.D.) with a 12" stainless steel outlet is FAST-2160-12-MJ-U100. For a carbon steel outlet, insert "A" into the catalog number. Example: FAST-2160-12A-MJ-U100

FEATURES

- Body, straps and UNC threaded studs are made of type 304 stainless steel. Support ring can be either type 304 stainless steel or ASTM A36 carbon steel
- All welds are fully passivated for corrosion resistance
- Certified to NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

08/21/20

Submitted By: