



SUBMITTAL INFORMATION

Stainless Steel Tapping Sleeve - (FASTP-xxx-x-MJ style)



STAINLESS STEEL TAPPING SLEEVE WITH MECHANICAL JOINT OUTLET FOR HDPE PIPE

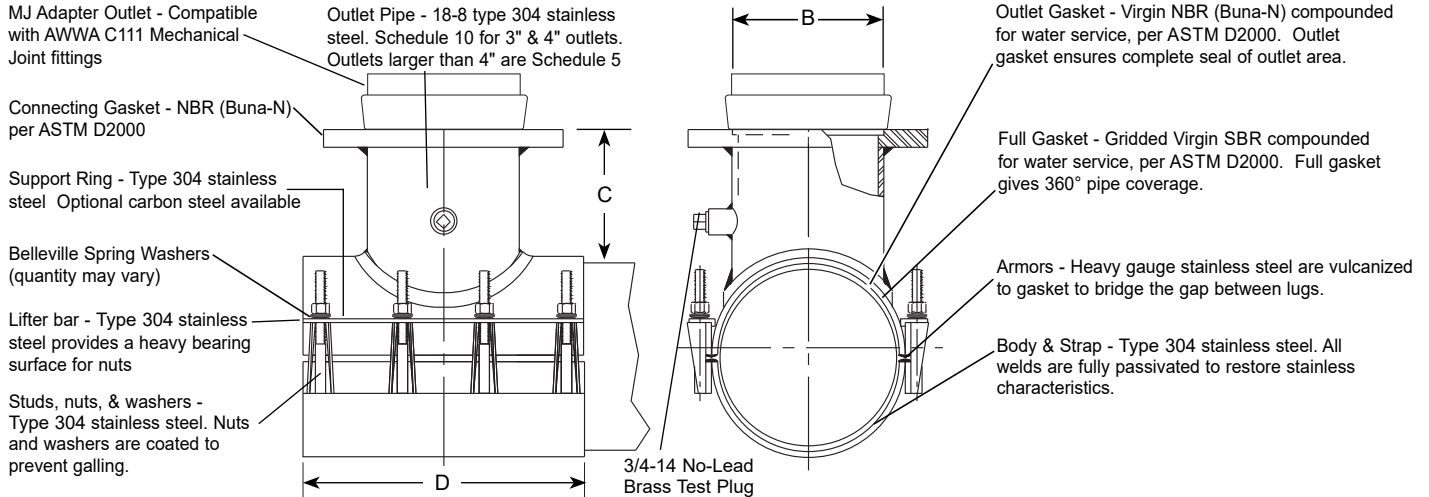

NOM PIPE SIZE	SLEEVE OD RANGE	BY	OUTLET SIZE CODE	APPROX WEIGHT LBS.	NOMINAL DIMENSIONS - INCHES			SADDLE THICKNESS (GAUGE)	STRAP THICKNESS (GAUGE)	STUD SIZE	No. OF STUDS	SLEEVE NUMBER	✓ SUBMITTED ITEM(S)
					B	C	D						
4	4.50 4.80		3	25	3-1/4	5-3/16	15	.075" (14)	.048" (18)	5/8"	8	FASTP-450-x-MJ	
			4	33	3-1/4	5-3/16	15					FASTP-480-x-MJ	
6	6.63 6.90		3	39	4-1/4	5-3/16	15	.105" (12)	.048" (18)	5/8"	8	FASTP-663-x-MJ	
			4	43	4-1/4	5-3/16	15					FASTP-690-x-MJ	
8	8.63 9.05		3	38	3-1/4	5-3/16	15	.105" (12)	.048" (18)	5/8"	8	FASTP-863-x-MJ	
			4	47	4-1/4	5-3/16	15					FASTP-905-x-MJ	
			6	47	6-13/32	5-1/2	15						
10	10.75 11.10		3	40	3-1/4	5-3/16	15	.105" (12)	.048" (18)	5/8"	8	FASTP-1075-x-MJ	
			4	46	4-1/4	5-3/16	15					FASTP-1100-x-MJ	
			6	50	6-13/32	5-1/2	15						
			8	68	8-13/32	5-5/8	20						
12	12.75 13.20		3	43	3-1/4	5-3/16	15	.105" (12)	.048" (18)	5/8"	8	FASTP-1275-x-MJ	
			4	49	4-1/4	5-3/16	15					FASTP-1320-x-MJ	
			6	53	6-13/32	5-1/2	15						
			8	72	8-13/32	5-5/8	20						
			10	77	10-31/64	6-1/8	20						
14	14.00 15.30		3	43	3-1/4	5-3/16	16	.105" (12)	.060" (16)	5/8"	8	FASTP-1400-x-MJ	
			4	70	4-1/4	5-3/16	16					FASTP-1530-x-MJ	
			6	74	6-13/32	5-1/2	16						
			8	93	8-13/32	5-5/8	20						
			10	98	10-31/64	6-1/8	20						
			12	132	12-27/64	6-1/4	24						

To order, add outlet size to catalog number. Example: The complete FASTP catalog number for an 8" pipe (9.05 O.D.) with a 6" stainless steel outlet is FASTP-905-6-MJ. For a carbon steel outlet, add "A" to the catalog number. Example: FASTP-905-6A-MJ.

FEATURES

- Body, straps and UNC threaded studs are made of type 304 stainless steel. Support ring can be either ASTM A240 type 304 stainless steel or ASTM A36 carbon steel
- All sleeves are fully passivated for corrosion resistance
- Belleville spring washers allow for limited pipe expansion and contraction
- UL Classified to NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

04/25/18

Submitted By: