



SUBMITTAL INFORMATION

Fabricated Transition Coupling - (FC23-xxx-xxx-xxD style)



4"-COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S WITH EPOXY COATING AND 316 STAINLESS STEEL HARDWARE

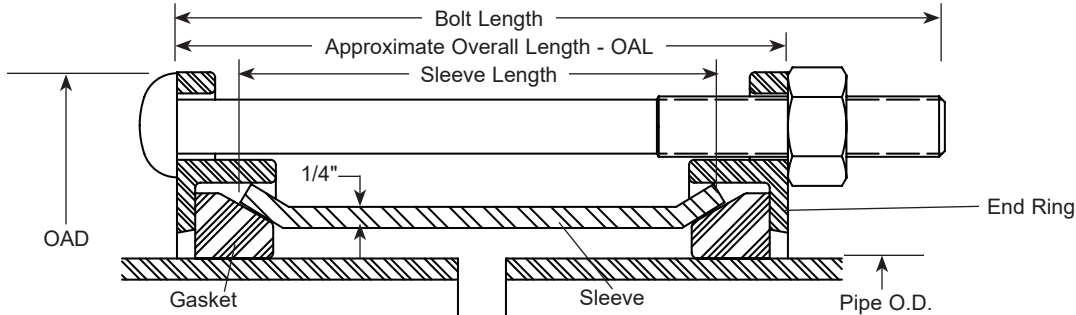

NOM. PIPE SIZE	GASKET RANGE		CENTER SLEEVE LENGTH	APPROX. OAL	No.	BOLTS		OAL	APPROX. WT. LBS.	CATALOG NUMBER	SUBMITTED ITEM(S)
	1ST END (IN.)	2ND END (IN.)				DIA.	LENGTH				
4"	4.00	4.00	5"	6-1/8"	3	5/8"	9"	8-7/8"	19	FC23-400-400-05D	
			7"	8-1/8"			10-1/2"		23	FC23-400-400-07D	
			10"	11-1/8"			13-1/2"		30	FC23-400-400-10D	
			16"	17-1/8"			20"		40	FC23-400-400-16D	
		4.50	5"	6-1/8"			9"		19	FC23-400-450-05D	
			7"	8-1/8"			10-1/2"		23	FC23-400-450-07D	
			10"	11-1/8"			13-1/2"		30	FC23-400-450-10D	
			16"	17-1/8"			20"		40	FC23-400-450-16D	
		4.80-5.14	5"	6-1/8"			9"		19	FC23-400-514-05D	
			7"	8-1/8"			10-1/2"		23	FC23-400-514-07D	
			10"	11-1/8"			13-1/2"		30	FC23-400-514-10D	
			16"	17-1/8"			20"		40	FC23-400-514-16D	
		5.15-5.57	5"	6-1/8"			9"		19	FC23-400-557-05D	
			7"	8-1/8"			10-1/2"		23	FC23-400-557-07D	
			10"	11-1/8"			13-1/2"		30	FC23-400-557-10D	
			16"	17-1/8"			20"		40	FC23-400-557-16D	
	4.50	4.50	5"	6-1/8"			9"		19	FC23-450-450-05D	
			7"	8-1/8"			10-1/2"		23	FC23-450-450-07D	
			10"	11-1/8"			13-1/2"		30	FC23-450-450-10D	
			16"	17-1/8"			20"		40	FC23-450-450-16D	
		4.80-5.14	5"	6-1/8"			9"		19	FC23-450-514-05D	
			7"	8-1/8"			10-1/2"		23	FC23-450-514-07D	
			10"	11-1/8"			13-1/2"		30	FC23-450-514-10D	
			16"	17-1/8"			20"		40	FC23-450-514-16D	
		5.15-5.57	5"	6-1/8"			9"		19	FC23-450-557-05D	
			7"	8-1/8"			10-1/2"		23	FC23-450-557-07D	
			10"	11-1/8"			13-1/2"		30	FC23-450-557-10D	
			16"	17-1/8"			20"		40	FC23-450-557-16D	
	4.80-5.14	4.80-5.14	5"	6-1/8"			9"		19	FC23-514-514-05D	
			7"	8-1/8"			10-1/2"		23	FC23-514-514-07D	
			10"	11-1/8"			13-1/2"		30	FC23-514-514-10D	
			16"	17-1/8"			20"		40	FC23-514-514-16D	
		5.15-5.57	5"	6-1/8"			9"		19	FC23-514-557-05D	
			7"	8-1/8"			10-1/2"		23	FC23-514-557-07D	
			10"	11-1/8"			13-1/2"		30	FC23-514-557-10D	
			16"	17-1/8"			20"		40	FC23-514-557-16D	
	5.15-5.57	5.15-5.57	5"	6-1/8"			9"		19	FC23-557-557-05D	
			7"	8-1/8"			10-1/2"		23	FC23-557-557-07D	
			10"	11-1/8"			13-1/2"		30	FC23-557-557-10D	
			16"	17-1/8"			20"		40	FC23-557-557-16D	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Sleeve - ASTM A36 Carbon Steel
- End Ring - Ductile Iron per ASTM A536. Color coded to match gasket
- Gasket - EPDM Molded Rubber: embossed with size and end ring color code
- Bolts & Nuts - Type 316 stainless steel per ASTM A193 and A194
- Finish - Epoxy coated per AWWA C213
- 200 PSI rated working pressure
- ANSI/NSF 61 Approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

07/20/22

Submitted By: