



SUBMITTAL INFORMATION

Fabricated Steel Coupling - (FC4-xxxx-AxxE style)



14" - 36" STYLE FC4 COUPLINGS FOR JOINING DUCTILE IRON SIZE PIPES WITH THE SAME O.D.

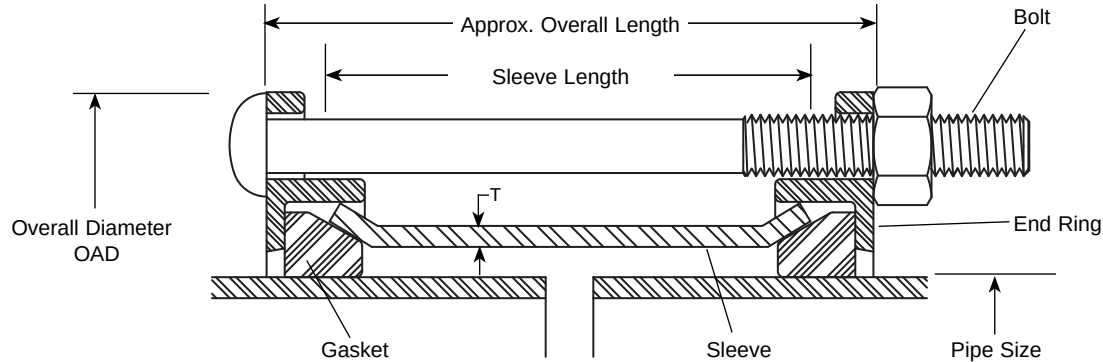

NOM. PIPE SIZE	PIPE O.D.	CENTER SLEEVE		APPROX. OVERALL LGTH.	BOLT			APPROX. WT. LBS.	OAD	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		LGTH.	(T) THICKNESS		DIA.	LGTH.	QTY.					
14"	15.30	7"	1/4"	8-1/8"	5/8"	10-1/2"	9	80	19-11/16"	434	FC4-1530-A07E	
	15.30	10"		11-1/8"		13-1/2"		91			FC4-1530-A10E	
16"	17.40	7"	1/4"	8-1/8"	5/8"	10-1/2"	10	89	22"	385	FC4-1740-A07E	
	17.40	10"		11-1/8"		13-1/2"		102			FC4-1740-A10E	
18"	19.50	7"	1/4"	8-1/8"	5/8"	10-1/2"	11	99	24-1/8"	345	FC4-1950-A07E	
	19.50	10"		11-1/8"		13-1/2"		114			FC4-1950-A10E	
20"	21.60	7"	1/4"	8-1/8"	5/8"	10-1/2"	12	107	25-1/4"	313	FC4-2160-A07E	
	21.60	10"		11-1/8"		13-1/2"		124			FC4-2160-A10E	
24"	25.80	7"	1/4"	8-1/8"	5/8"	10-1/2"	14	127	30-7/16"	264	FC4-2580-A07E	
	25.80	10"		11-1/8"		13-1/2"		146			FC4-2580-A10E	
30"	32.00	7"	1/4"	8-1/8"	5/8"	10-1/2"	16	143	36-5/8"	230	FC4-3200-A07E	
	32.00	10"		11-1/8"		13-1/2"		166			FC4-3200-A10E	
36"	38.30	7"	1/4"	8-1/8"	5/8"	10-1/2"	18	186	42-11/16"	193	FC4-3830-A07E	
	38.30	10"		11-1/8"		13-1/2"		196			FC4-3830-A10E	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve: Carbon steel per ASTM A36
- End Rings: Cold rolled carbon steel per AISI 1020
- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: 3M ScotchKote 206N fusion bonded epoxy - NSF61 approved
- Gasket: Extruded SBR rubber per ASTM D2000 M4AA810 with heat bonded joint
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

05/05/15

Submitted By: