



SUBMITTAL INFORMATION

Fabricated Steel Coupling - (FC4-xxxx-BxxX style)



**FC4 COUPLING FOR JOINING DUCTILE IRON SIZE PIPES WITH THE SAME O.D.
WITH 304 STAINLESS STEEL HARDWARE**

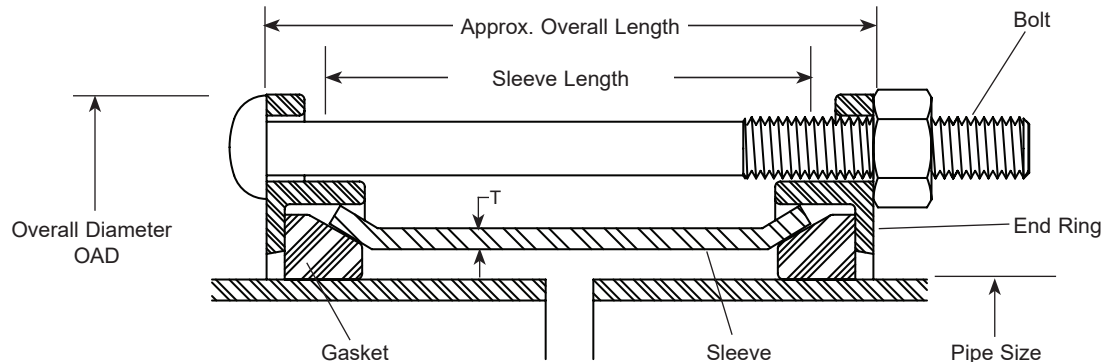

NOM. PIPE SIZE (IN.)	PIPE O.D. (IN.)	CENTER SLEEVE		APPROX. OVERALL LENGTH (IN.)	BOLT			APPROX. WT. LBS.	OAD (IN.)	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		LENGTH (IN.)	(T)HICKNESS (IN.)		DIA. (IN.)	LENGTH (IN.)	QTY.					
14	15.30	7	3/8	8-1/8	5/8	10-1/2	9	92	19-11/16	592	FC4-1530-B07X	
	15.30	10		11-1/8		13-1/2		109			FC4-1530-B10X	
16	17.40	7	3/8	8-1/8	5/8	10-1/2	10	103	22	567	FC4-1740-B07X	
	17.40	10		11-1/8		13-1/2		122			FC4-1740-B10X	
18	19.50	7	3/8	8-1/8	5/8	10-1/2	11	115	24-1/8	512	FC4-1950-B07X	
	19.50	10		11-1/8		13-1/2		136			FC4-1950-B10X	
20	21.60	7	3/8	8-1/8	5/8	10-1/2	12	125	25-1/4	463	FC4-2160-B07X	
	21.60	10		11-1/8		13-1/2		148			FC4-2160-B10X	
24	25.80	7	3/8	8-1/8	5/8	10-1/2	14	148	30-7/16	392	FC4-2580-B07X	
	25.80	10		11-1/8		13-1/2		176			FC4-2580-B10X	
30	32.00	7	3/8	8-1/8	5/8	10-1/2	16	166	36-5/8	343	FC4-3200-B07X	
	32.00	10		11-1/8		13-1/2		201			FC4-3200-B10X	
36	38.30	7	3/8	8-1/8	5/8	10-1/2	18	226	42-11/16	289	FC4-3830-B07X	
	38.30	10		11-1/8		13-1/2		267			FC4-3830-B10X	
42	44.50	7	3/8	8-1/8	5/8	10-1/2	20	271	49-5/8	250	FC4-4450-B07X	
	44.50	10		11-1/8		13-1/2		318			FC4-4450-B10X	
48	50.80	7	3/8	8-1/8	5/8	10-1/2	22	309	55-15/16	220	FC4-5080-B07X	
	50.80	10		11-1/8		13-1/2		363			FC4-5080-B10X	
54	57.56	7	3/8	8-1/8	5/8	10-1/2	24	353	62-11/16	200	FC4-5756-B07X	
	57.56	10		11-1/8		13-1/2		414			FC4-5756-B10X	
60	61.61	7	3/8	8-1/8	5/8	10-1/2	26	382	66-3/4	200	FC4-6161-B07X	
	61.61	10		11-1/8		10-1/2		447			FC4-6161-B10X	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Center Sleeve - Carbon steel per ASTM A36
- End Rings - Cold rolled carbon steel per AISI 1020
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194
- Finish - Shop coat
- Gasket - SBR rubber per ASTM D2000
- Complies with AWWA C219 standards
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

12/02/24

Submitted By: