
SUBMITTAL INFORMATION



Fabricated Steel Transition Coupling - (FC5-xxxx-xxxx-BxxR style)

30" - 48" STYLE FC5 COUPLINGS FOR JOINING PIPES WITH DIFFERENT O.D.'S

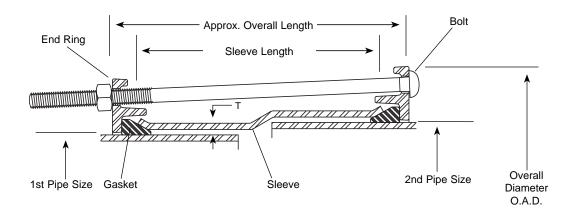

Nom. Pipe Size	1ST END PIPE O.D.	Вү	2ND END PIPE O.D.	CENTER SLEEVE		Вогтя			APPROX.		APPROX.	RATED	CATALOG	✓ SUBMITTED
				(T)HICKNESS	Lgth.	DIA.	L GТН.	QTY.	OVERALL LENGTH	OAD	Wt. Lbs.	Working Pressure	Number	ITEM(S)
30"	32.00	X	32.40	3/8"	10"	5/8"	13-1/2"	16	11-1/8"	37"	184	230	FC5-3200-3240-B10R	
36"	38.30	X	38.70	3/8"	10"	5/8"	13-1/2"	18	11-1/8"	43-13/16"	267	193	FC5-3830-3870-B10R	
	38.30		38.70		15"	5/8"	17-1/2"	18	16-1/8"	43-13/16"	341	193	FC5-3830-3870-B15R	
42"	44.20		44.50	3/8"	10"	5/8"	13-1/2"	20	11-1/8"	49-5/8"	318	250	FC5-4420-4450-B10R	
	44.50		45.10		10"	5/8"	13-1/2"	20	11-1/8"	50-1/4"	320	250	FC5-4450-4510-B10R	
	44.50		45.10		15"	5/8"	17-1/2"	20	16-1/8"	50-1/4"	415	250	FC5-4450-4510-B15R	
	44.50		45.58		10"	5/8"	13-1/2"	20	11-1/8"	50-11/16"	320	250	FC5-4450-4558-B10R	
48"	50.50		50.80	3/8"	10"	5/8"	13-1/2"	22	11-1/8"	55-15/16"	363	220	FC5-5050-5080-B10R	
	50.80		51.40		10"	5/8"	13-1/2"	22	11-1/8"	56-1/2"	363	220	FC5-5080-5140-B10R	
	50.80		51.40		15"	5/8"	13-1/2"	22	16-1/8"	56-1/2"	465	220	FC5-5080-5140-B15R	
	50.80		51.98		10"	5/8"	13-1/2"	22	11-1/8"	57-1/8"	363	220	FC5-5080-5198-B10R	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

Center Sleeve: Carbon Steel per ASTM A36

• End Rings: Cold Rolled Carbon Steel per AISI 1018-1020

• Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111

Coating: Black Alkyd Enamel Shop Coat - NSF61 Approved

Gasket: Extruded SBR rubber per ASTM D2000 M4AA810 with Heat Bonded Joint

Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By: