



# SUBMITTAL INFORMATION

## Steel Reducing Coupling - (FC6-xxxx-xxxx-Y-U100 style)



### STYLE FC6 COUPLINGS (WITH 304 STAINLESS STEEL HARDWARE) FOR JOINING PIPES WITH DIFFERENT O.D.'S

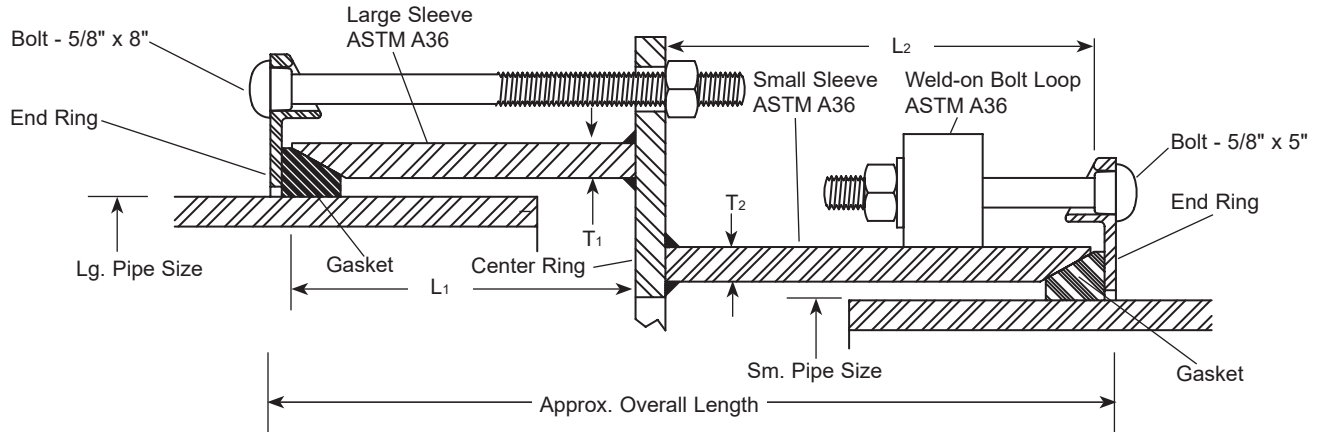

NOM PIPE SIZE	LARGE END				BY	NOM PIPE SIZE	SMALL END				APPROX. OVERALL LENGTH	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
	GASKET RANGE	LENGTH L1	BOLT QTY.	DIM T1			GASKET RANGE	LENGTH L2	BOLT QTY.	DIM T2			
18"	18.00"	5"	10	1/4" or 3/8"	X	14"	15.30"-15.70"	7"	9	1/4" or 3/8"	13-1/2"	FC6-1800-1570-Y-U100	
16"-18"	18.45"-18.97"	5"	10	1/4" or 3/8"	X	14"-16"	16.00"-16.35"	7"	9	1/4" or 3/8"	13-1/2"	FC6-1897-1635-Y-U100	
18"-20"	19.33"	5"	11	1/4" or 3/8"	X	16"-18"	17.40"-17.80"	7"	10	1/4" or 3/8"	13-1/2"	FC6-1933-1780-Y-U100	
20"	23.73"	5"	12	1/4" or 3/8"	X	20"	21.60"	7"	12	1/4" or 3/8"	13-1/2"	FC6-2373-2160-Y-U100	

**Note:** Flexible couplings do not restrain axial forces on piping.

## FEATURES

- Sleeves - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Rings - Carbon steel per AISI 1018-1020 or ductile iron per ASTM A536
- Bolts and Nuts - Type 304 stainless steel per ASTM A193 and A194
- Gasket - SBR rubber per ASTM D2000
- Finish - Fusion bonded epoxy - NSF 61 approved
- Complies with AWWA C219 standards
- Rated for 150 psi, not to exceed the rating of the pipe
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

05/04/23

Submitted By: