
SUBMITTAL INFORMATION





10" STYLE FCA COUPLINGS FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

Standard FCA Coupling

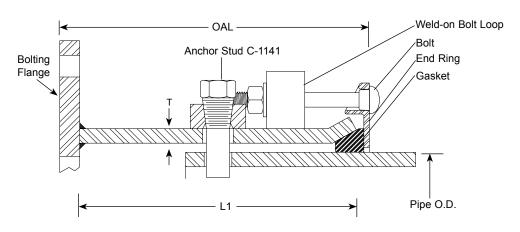

Nom. Pipe Size	COUPLING GASKET RANGE (IN.)	FLG. SIZE	END RING BOLTS			SLEEVE LENGTH	Approx. Overall	Approx. Wt.	RATED WORKING	CATALOG	✓ SUBMITTED
			DIA.	Lgтн.	QTY.	L1	LENGTH	LBS.	Pressure (PSI)	Number	ITEM(S)
10"	11.10 - 11.46	10"	5/8"	5"	6	12"	13-1/2"	69	175	FCA-1146-D10R-AS2	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

• Sleeve: Carbon steel per ASTM A36 · Center Ring: Carbon steel per ASTM A36 End Rings: Ductile iron per ASTM A536

Bolts and Nuts: Low alloy steel per ASTM A242 or AWWA C111

· Flange: Class D AWWA C207

· Gasket: SBR rubber per ASTM D2000

· Finish: Black shop coat - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

2/26/19	