



SUBMITTAL INFORMATION

Adapter Flanges - (FCA-2575-D24Z-U style)



FCA COUPLINGS FOR CONNECTING PLAIN END PIPE TO FLANGED FITTINGS

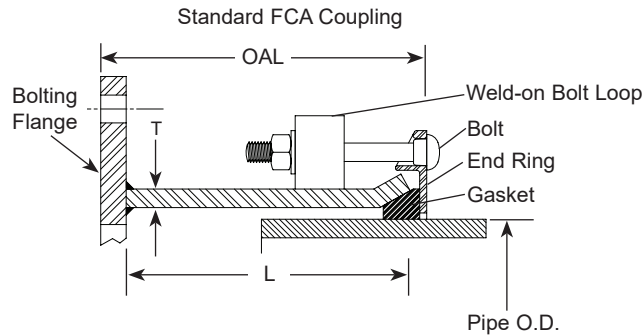

NOM. PIPE SIZE	COUPLING GASKET RANGE (IN.)	FLG. SIZE	END RING BOLTS*			T	L	APPROX. OVERALL LENGTH	APPROX. WT. LBS.	RATED WORKING PRESSURE	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
			DIA.	LGTH.	QTY.							
24"	25.75	24"	5/8"	5"	14	1/4"	10"	11-1/2"	235	150	FCA-2575-D24Z-U	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Sleeve - Carbon steel per ASTM A36
- Center Ring - Carbon steel per ASTM A36
- End Ring - Carbon steel per AISI 1018/1020
- Bolts and Nuts - Type 316 stainless steel per ASTM A193 and A194
- Flange - Class D AWWA C207
- Gasket - SBR rubber per ASTM D2000
- Finish - Epoxy coating - NSF 61 certified

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

10/26/23

Submitted By: