



SUBMITTAL INFORMATION

Dismantling Joint - (FDJ-FxxR style)



DISMANTLING JOINT - CLASS F FLANGE

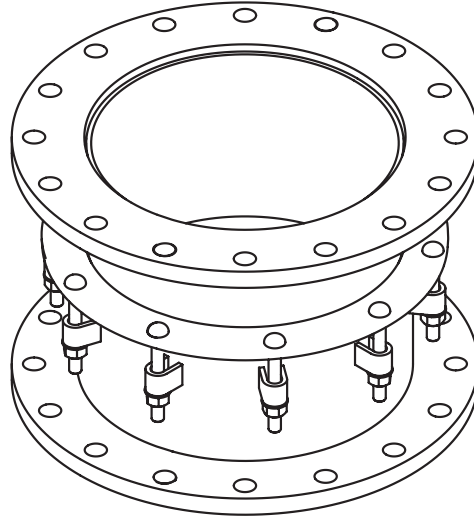

NOMINAL SIZE (IN.)	CATALOG NUMBER	NOMINAL LENGTH (IN.)	MINIMUM LENGTH (IN.)	MAXIMUM LENGTH (IN.)	✓ SUBMITTED ITEM(S)
4	FDJ-F4R	13-1/8	11-1/2	14-3/4	
6	FDJ-F6R	14	12-1/2	15-1/2	
8	FDJ-F8R	16-1/4	14-1/2	18	
10	FDJ-F10R	16-7/8	15-1/8	18-5/8	
12	FDJ-F12R	17-1/8	15-5/8	18-5/8	
14	FDJ-F14R	16-3/4	15-1/4	18-1/4	
16	FDJ-F16R	17-1/4	15-3/4	18-3/4	
18	FDJ-F18R	17-1/2	16	19	
20	FDJ-F20R	17-1/2	16	19	
24	FDJ-F24R	18-1/8	16-5/8	19-5/9	
30	FDJ-F30R	19-3/8	18-1/4	20-1/2	
36	FDJ-F36R	19-7/8	18-7/8	20-7/8	
42	FDJ-F42R	19-5/8	17-7/8	21-3/8	
48	FDJ-F48R	22-5/8	21	24-1/4	

FEATURES

- Flange: Drilling per ANSI/AWWA C110/A21, ANSI B16.5 250 lb. Drilling, AWWA Class F Flange
- Flange and adjusting pipe: ASTM A36 carbon steel
- Gaskets - Extruded SBR Rubber per ASTM D2000
- Bolts and nuts - High strength, low alloy steel per AWWA C-111
- Finish - Shop Coat
- Certified to ANSI/NSF 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

07/19/24

Submitted By: