


SUBMITTAL INFORMATION

Repair Clamps - (FS3-xxxx-Length-U100 style)



THREE SECTION ALL STAINLESS STEEL REPAIR CLAMPS

Lifter Bar
Type 304 heavy gauge stainless steel

Band
Type 304 stainless steel

Sidebar
Type 304 heavy gauge stainless steel

Lug
Type 304 heavy gauge stainless steel


Bolts & Nuts
Type 304 stainless steel nuts and washers per ASTM A193 and A194. Nuts are coated to prevent galling.

Length

Gasket
Gridded virgin SBR compounded for water service per ASTM D2000. NBR (Buna-N) is optional.

Armor
Type 304 heavy gauge stainless steel, mold bonded into the gasket to ensure uniform compression against the pipe

Optional Stainless Taps
Type 304 stainless steel TIG welded to band. Available with AWWA or I.P. threads.

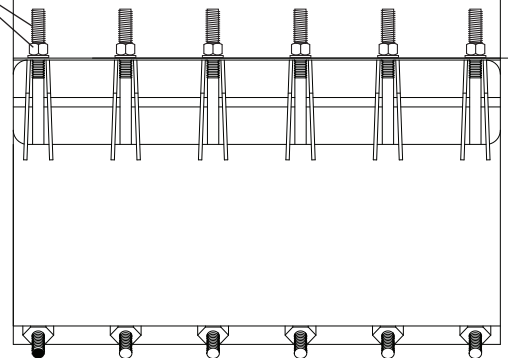

OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
Thread	Code No.	Thread	Code No.
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

NOM. PIPE SIZE (IN.)	PIPE O.D. RANGE (IN.)	LENGTH AND APPROX. WEIGHT (LBS.)					BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM
		12.5"	15"	20"	24"	30"				
16	15.92 - 17.12	31	40	52	64	77	5/8" 11 UNC	20 GA.	FS3-1712-Length-U100	
	17.10 - 18.30								FS3-1830-Length-U100	
18	18.00 - 19.20	35	44	56	68	84			FS3-1920-Length-U100	
	18.78 - 19.98								FS3-1998-Length-U100	
20	19.50 - 20.70	41	48	60	73	89			FS3-2070-Length-U100	
	21.60 - 22.80								FS3-2280-Length-U100	
24	22.80 - 24.00	46	53	65	79	102			FS3-2400-Length-U100	
	23.25 - 24.45								FS3-2445-Length-U100	
	24.45 - 25.65								FS3-2565-Length-U100	
	25.80 - 27.00								FS3-2700-Length-U100	
30	29.62 - 30.82	51	62	83	88	130			FS3-3082-Length-U100	
	30.80 - 32.00								FS3-3200-Length-U100	
	31.22 - 32.42								FS3-3242-Length-U100	
	31.74 - 32.90								FS3-3290-Length-U100	
Number of studs		12	12	18	21	27				

FEATURES

- NBR (Buna-N) gasket and conductivity strips are available
- Optional outlet taps are available for repair of service line pull-outs. Add tapping code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Certified to ANSI/NSF 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

08/07/25

Submitted By: