



SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSC-xxxx-xx-MJ style)



STEEL TAPPING SLEEVE (EPOXY COATED) - 36" TO 48" WITH MECHANICAL JOINT OUTLET

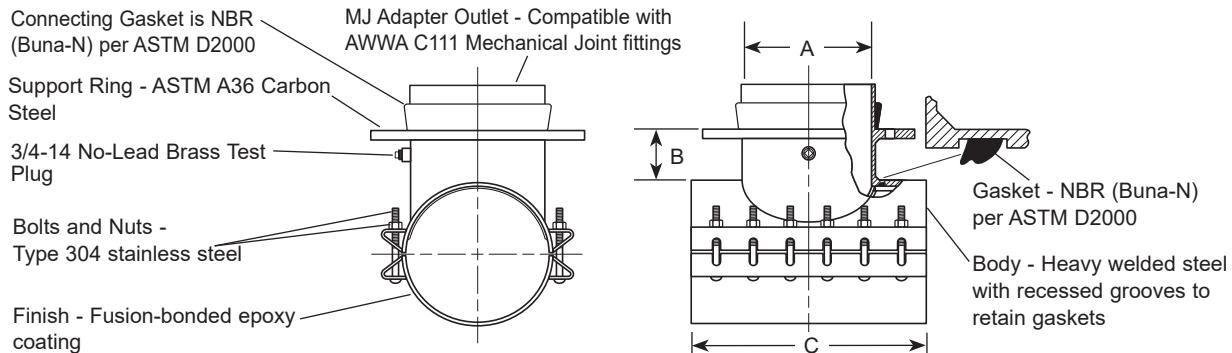

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	BY	OUTLET SIZE CODE*	NOMINAL DIMENSIONS - INCHES			MIN. NO. OF BOLTS	CATALOG NUMBER*	✓ SUBMITTED ITEM(S)	
				A	B	C				
36"	35.50-36.20	X	4	4-1/4	5-3/16	16	6	FTSC-3620-xx-MJ		
			6	6-13/32	5-3/16	16	6			
			8	8-13/32	5-3/16	16	8			
			10	10-27/64	5-3/16	20	10			
			12	12-27/64	5-3/16	24	12			
	37.60-38.30		14	14	6-1/4	24	16	FTSC-3830-xx-MJ		
			16	16	6-1/4	32	16			
			18	18	6-1/4	36	18			
			20	20	6-1/4	40	20			
			24	24	6-1/4	48	32			
42"	41.70-42.40	X	4	4-1/4	5-3/16	16	6	FTSC-4240-xx-MJ		
			6	6-13/32	5-3/16	16	6			
			8	8-13/32	5-3/16	16	8			
			10	10-27/64	5-3/16	20	10			
			12	12-27/64	5-3/16	24	14			
	42.40-43.10		14	14	6-1/4	24	16	FTSC-4310-xx-MJ		
			16	16	6-1/4	32	20			
			18	18	6-1/4	36	24			
			20	20	6-1/4	40	24			
			24	24	6-1/4	48	32			
48"	43.10-43.80	X	4	4-1/4	5-3/16	16	6	FTSC-4380-xx-MJ		
			6	6-13/32	5-3/16	16	6			
			8	8-13/32	5-3/16	16	8			
			10	10-27/64	5-3/16	20	10			
			12	12-27/64	5-3/16	24	14			
	43.90-44.60		14	14	6-1/4	24	16	FTSC-4460-xx-MJ		
			16	16	6-1/4	32	20			
			18	18	6-1/4	36	24			
			20	20	6-1/4	40	24			
			24	24	6-1/4	48	32			
50"	44.60-45.30	X	4	4-1/4	5-3/16	16	6	FTSC-4530-xx-MJ		
			6	6-13/32	5-3/16	16	6			
			8	8-13/32	5-3/16	16	8			
			10	10-27/64	5-3/16	20	10			
			12	12-27/64	5-3/16	24	14			
	45.00-45.70		14	14	6-1/4	24	16	FTSC-4570-xx-MJ		
			16	16	6-1/4	32	20			
			18	18	6-1/4	36	24			
			20	20	6-1/4	40	24			
			24	24	6-1/4	48	32			
52"	45.70-46.40	X	4	4-1/4	5-3/16	16	6	FTSC-4640-xx-MJ		
			6	6-13/32	5-3/16	16	6			
			8	8-13/32	5-3/16	16	8			
			10	10-27/64	5-3/16	20	10			
			12	12-27/64	5-3/16	24	14			
	46.40-47.10		14	14	6-1/4	24	16	FTSC-4710-xx-MJ		
			16	16	6-1/4	32	20			
			18	18	6-1/4	36	24			
			20	20	6-1/4	40	24			
			24	24	6-1/4	48	32			

*To Order: Add outlet size code to the sleeve number. Example: A 12" outlet on 36" cast iron pipe would be FTSC-3870-12-MJ.

Note: A 1" undersize cutter is required for outlets 14" and larger. Oversize outlets are available by special request.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are made of Grade 18-8 type 304 stainless steel
- Fusion-bonded epoxy-coating on body is no less than 12 mils thick
- Certified to ANSI/NSF 61
- Rated for up to 250 psi. Rating not to exceed the pressure rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.

FORD The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: