


SUBMITTAL INFORMATION

Steel Tapping Sleeve - (FTSCP-xxx-x style)





STEEL TAPPING SLEEVE (EPOXY COATED) - 6" TO 12" FOR HDPE PIPE, SDR 9 THROUGH SDR 17

Flange - ASTM A36 Carbon Steel - Flat face, recessed for standard tapping valve.

3/4-14 No-Lead Brass
Test Plug

Bolts and Nuts - Type 304
Stainless Steel

Finish - Fusion Bonded Epoxy
Coating

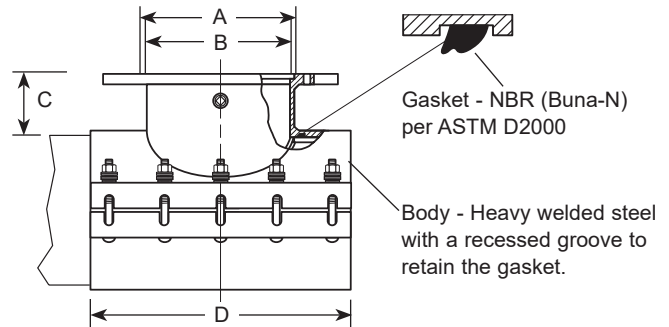

NOM. PIPE SIZE	SLEEVE O.D. RANGE (IN.)	SLEEVE NUMBER	BY	FLANGE SIZE CODE	NOMINAL DIMENSIONS - INCHES				No. OF BOLTS	SIZE OF BOLTS	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEM(S)
					COUNTER- BORE ID	OUTLET PIPE ID	TOP OF PIPE TO TOP OF FLANGE	WIDTH				
					A	B	C	D				
6"	6.63 6.90	FTSCP-663- FTSCP-690-		2	3-1/16	3-1/4	5-1/16	16	10	3/4	286	
				3	4-1/16	3-1/4	5-1/16	16	10	3/4	287	
				4	5-1/16	4-1/4	5-1/16	16	10	3/4	288	
8"	8.63 9.05	FTSCP-863- FTSCP-905-		2	3-1/16	3-1/4	5-1/16	16	10	3/4	255	
				3	4-1/16	3-1/4	5-1/16	16	10	3/4	257	
				4	5-1/16	4-1/4	5-1/16	16	10	3/4	259	
10"	10.75 11.10	FTSCP-1075- FTSCP-1110-		6	7-1/16	6-13/32	5-1/16	16	10	3/4	284	
				2	3-3/64	2-1/16	5-3/16	12	6	3/4	79	
				3	4-3/64	3-1/16	5-3/16	12	6	3/4	81	
				4	5-3/64	4-1/8	5-3/16	12	6	3/4	84	
				6	7-3/64	6-1/4	5-3/16	12	6	3/4	93	
12"	12.75 13.20	FTSCP-1275- FTSCP-1320-		8	9-3/64	8-1/4	5-3/16	16	8	3/4	130	
				2	3-3/64	2-1/16	5-3/16	12	6	3/4	87	
				3	4-3/64	3-1/16	5-3/16	12	6	3/4	89	
				4	5-3/64	4-1/8	5-3/16	12	6	3/4	92	
				6	7-3/64	6-1/4	5-3/16	12	6	3/4	100	
				8	9-3/64	8-1/4	5-3/16	16	8	3/4	140	
				10	11-3/64	10-1/4	5-3/16	20	10	3/4	190	

*** To order: Add flange size to the sleeve number. Example: A 4" flange on 6" HDPE pipe would be FTSCP-663-4.

FEATURES

- Heavy welded steel meeting ASTM A36 36,000 psi minimum yield
- Bolts and nuts are type 304 stainless steel per ASTM A193 and A194, Belleville spring tension washers under the nuts
- Ring style gasket is NBR (Buna-N) per ASTM D2000
- Rated for 250 psi up to 24" outlets. 30"-36" outlets rated for 200 psi. Ratings not to exceed the rating of the pipe.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/07/23

Submitted By: