




SUBMITTAL INFORMATION

Coupling for Flanged Lead Corporation Stops - (LFC4-xx-NL style)



FEMALE FLANGED LEAD THREAD INLET BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

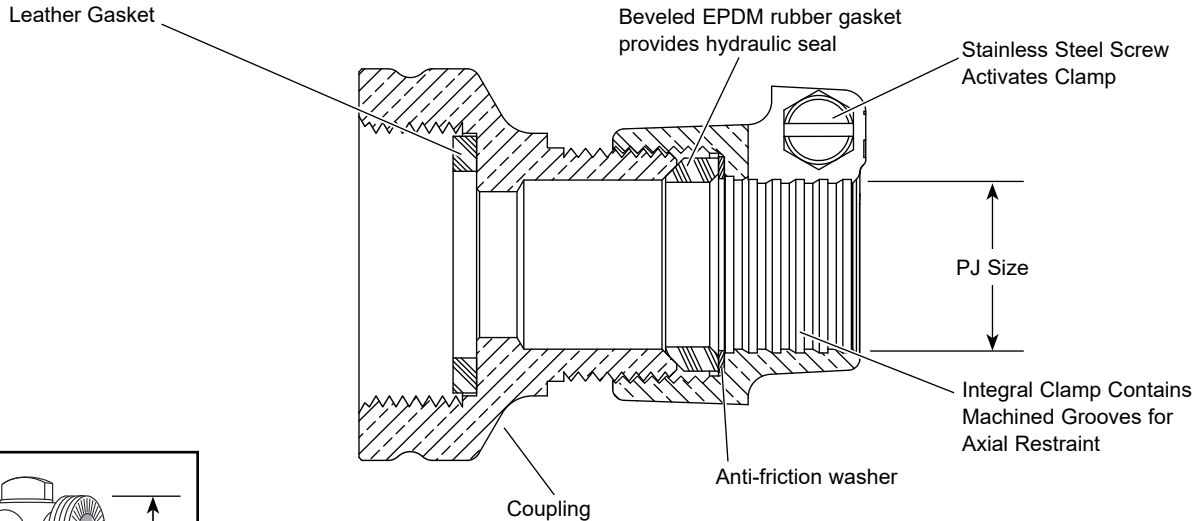

DESCRIPTION		APPROX.	APPROX.	PART	✓ SUBMITTED
INLET SIZE/TYPE	OUTLET SIZE (PJN)	"A" DIMENSION	WT. LBS	NUMBER	ITEM(S)
1/2" XS	3/4"	1-7/16"	0.8	LFC4-13-NL	
5/8" XS	3/4"	1-5/8"	0.8	LFC4-23-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS No. C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS No. C83600, 85-5-5-5)
- Replaces flanged lead gooseneck connections
- Leather gasket is included

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/01/18

Submitted By: