

SUBMITTAL INFORMATION





CONNECTS METER AND PRESSURE REGULATOR IN A TANDEM COPPERSETTER

METER NUT BY METER NUT

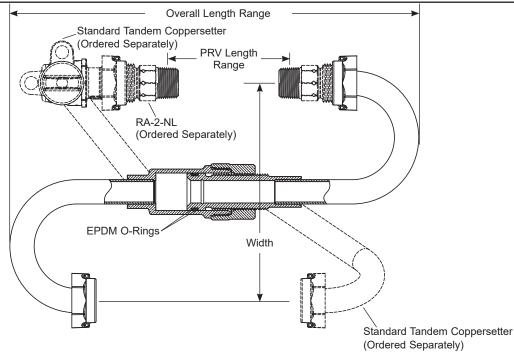

OVERALL **PRV LENGTH** METER SIZE **COPPER TUBE WIDTH** APPROX. **PART** ✓ SUBMITTED LENGTH RANGE RANGE (IN.) O.D. (IN.) (IN.) Wt. Lbs. NUMBER ITEM(S) (IN.) (ln.) 5/8 x 3/4 13/16 12.63-14.63 3.38-5.38 7-1/4 3.2 ST-2-EXP-NL

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Copper conforms to ASTM B75 or B88, UNS C12200
- Assembled with lead-free solder
- · Gaskets included
- · 2" adjustment range accommodates most standard PRVs
- Adjusts 11/64" per turn with internal stop to prevent unintentional disassembly
- Threaded no-lead brass construction with double EPDM O-ring seals
- Tandem coppersetter and RA-2-NL adapters ordered separately

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

05/30/25

Submitted By: