

SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1300-S-xx-U style)



SERIES 1300-S 14" - 48" RESTRAINT FOR IPS PVC OR HDPE PIPE AND MECHANICAL JOINT FITTINGS

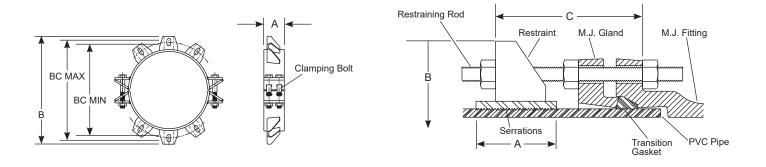

Nom. Pipe Size	OD (In.)	CATALOG NO.	A	B Approx.	C Max	RESTRAINING BOLTS / RODS		CLAMPING BOLTS		BC Min	BC Max	APPROX. WEIGHT LBS	✓ SUBMITTED
						No.	Size	No.	Size			LDS	
14"	14.00	UFR1300-S-14-U	4"	21-7/16"	15"	6	3/4" x 17"	4	7/8" x 7"	17.13"	19.13"	72.5	
16"	16.00	UFR1300-S-16-U	4"	23-5/16"	15"	6	3/4" x 17"	4	7/8" x 7"	19.09"	21.09"	77.0	
18"	18.00	UFR1300-S-18-U	5"	25-9/16"	15"	8	3/4" x 17"	4	1" x 7"	21.09"	23.09"	109.0	
20"	20.00	UFR1300-S-20-U	5"	27-9/16"	22"	8	3/4" x 24"	4	1" x 7"	23.13"	25.13"	144.0	
24"	24.00	UFR1300-S-24-U	5"	31-9/16"	22"	12	3/4" x 24"	4	1" x 7"	27.13"	29.13"	220.0	
30"	30.00	UFR1300-S-30-U	10"	38-3/4"	22"	12	1" x 24"	6	1-1/8" x 9"	34.13"	36.13"	300.0	
36"	36.00	UFR1300-S-36-U	10"	45-7/8"	22"	12	1" x 24"	6	1-1/8" x 9"	40.25"	43.25"	340.0	
42"	42.00	UFR1300-S-42-U	10"	54-11/16"	24"	18	1-1/4" x 30"	8	1-1/8" x 9"	47.77"	50.77"	375.0	
48"	48.00	UFR1300-S-48-U	10"	60-7/8"	24"	22	1-1/4" x 30"	8	1-1/8" x 9"	53.83"	56.83"	400.0	

Note: For DR18, longer rods may be required. Please contact factory for more information.

FEATURES

- Fabricated out of carbon steel per ASTM A36
- 360° contact and support of the pipe wall
- · Ideal companion for push-on fittings with restraint ears
- Rods (included) are high strength, low alloy steel ANSI / AWWA C111 / A21.11
- · Clamping bolts and nuts Grade 5, zinc plated
- Rated at full-rated pressure of any class of PVC pipe or HDPE (SDR9 through SDR26) with the use of a proper insert stiffener; minimum 2:1 safety factor
- Coating Black alkyd enamel shop coat (NSF61 approved) with gray topcoat for identification purposes

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com



Submitted Bv:

ANGE | |