



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-C-xx-U100 style)




SERIES 1390-C RESTRAINT HARNESS FOR PVC PIPE OR HDPE BELL JOINTS

1300 SPLIT RESTRAINT

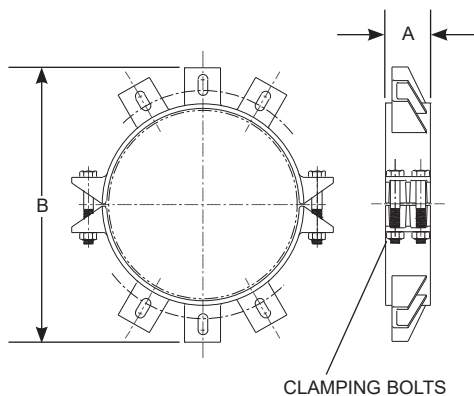

1390 ASSEMBLY

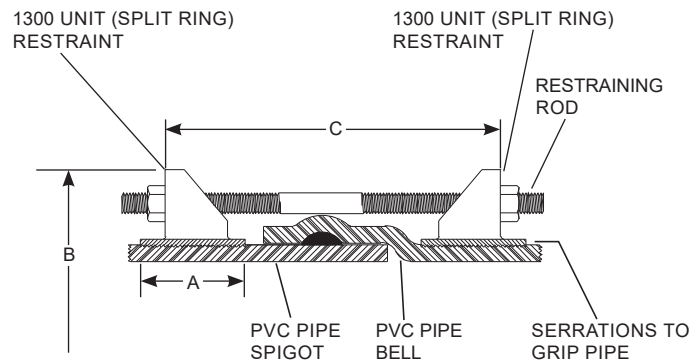

NOM. PIPE SIZE (IN.)	OD (IN.)	CATALOG NUMBER	A (IN.)	B APPROX. (IN.)	C MAX (IN.)	RESTRAINT BOLTS / RODS (IN.)	CLAMPING BOLTS PER GLAND (IN.)	MAX BELL CLEARANCE (IN.)	APPROX. WEIGHT LBS	✓ SUBMITTED ITEM(S)
						NUMBER AND SIZE	NUMBER AND SIZE			
14	15.30	UFR1390-C-14-U100	4	22-3/4	28	(6) 3/4 x 30	(4) 7/8 x 7	19.56	136	
16	17.40	UFR1390-C-16-U100	4	24-5/8	28	(6) 3/4 x 30	(4) 7/8 x 5	21.63	135	
18	19.50	UFR1390-C-18-U100	5	26-3/4	28	(8) 3/4 x 30	(4) 1 x 7	23.75	206	
20	21.60	UFR1390-C-20-U100	5	29	34	(8) 3/4 x 36	(4) 1 x 7	25.88	263	
24	25.80	UFR1390-C-24-U100	5	33-5/32	34	(12) 3/4 x 36	(4) 1 x 7	30.00	406	
30	32.00	UFR1390-C-30-U100	10	40-5/8	46	(12) 1 x 48	(6) 1-1/8 x 9	37.00	601	
36	38.30	UFR1390-C-36-U100	10	48	46	(12) 1 x 48	(8) 1-1/8 x 9	44.38	672	
42	44.50	UFR1390-C-42-U100	10	57-3/16	70	(18) 1-1/4 x 52	(8) 1-1/8 x 9	51.75	981	
48	50.80	UFR1390-C-48-U100	10	63-5/8	70	(22) 1-1/4 x 52	(8) 1-1/8 x 9	58.00	1021	

Note: For DR18, longer rods may be required. Please contact factory for more information.

FEATURES

- Fabricated carbon steel per ASTM A36 or cast ductile iron per ASTM A536
- Rods (included) - high strength, low alloy steel per ANSI / AWWA C111/A21.11
- Side clamping nuts and bolts - Grade 5, zinc plated
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Finish - Shop coat - NSF 61 certified
- Installation on HDPE (SDR9 through SDR26) requires use of a properly sized insert stiffener
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



06/03/25

Submitted By: