



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-P-xx-E-U style)




SERIES 1390-P 18"- 27" RESTRAINT HARNESS FOR SEWER PVC PIPE BELL AND SPIGOT JOINTS

1300 SPLIT RESTRAINT

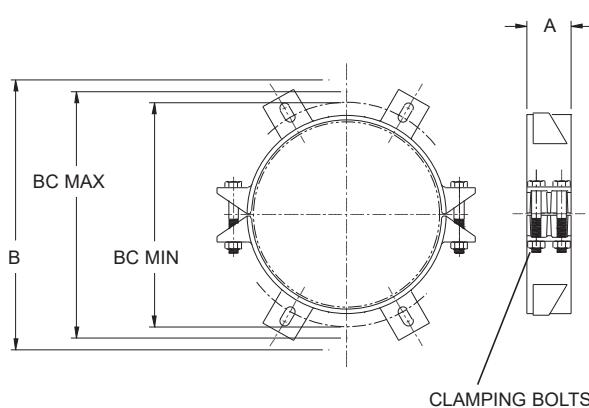

1390 ASSEMBLY

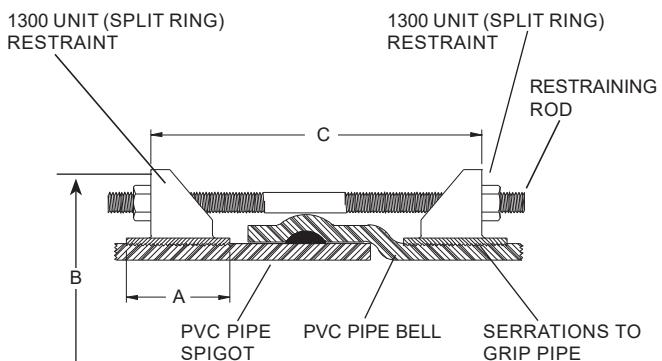

NOM PIPE SIZE	STYLE 1390-P		A	B APPROX	C MAX	RESTRAINING RODS		CLAMPING BOLTS PER GLAND		BC MIN	BC MAX	APPROX. WT. LBS.	✓SUBMITTED ITEM(S)
	OD (IN.)	CATALOG NUMBER				QTY.	SIZE	QTY.	SIZE				
	18"	18.70	UFR1390-P-18-E-U	4"	26-3/16"	28"	4	3/4" x 30"	4	7/8" x 7"	21.88"	23.88"	124
21"	22.05	UFR1390-P-21-E-U	4"	28-13/16"	34"	4	3/4" x 36"	4	7/8" x 7"	24.56"	26.56"	137	
24"	24.80	UFR1390-P-24-E-U	4"	32-3/16"	34"	4	3/4" x 36"	4	7/8" x 7"	27.94"	29.94"	153	
27"	27.95	UFR1390-P-27-E-U	4"	35-3/8"	34"	4	3/4" x 36"	4	7/8" x 7"	31.09"	33.09"	170	

FEATURES

- Carbon steel per ASTM A36
- Black epoxy coating - NSF 61 approved
- Side clamping bolts and nuts - SAE J429, grade 5
- Rods (included) - High strength, low alloy steel per ANSI/AWWA C111/A21.11
- 50 psi rated working pressure with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



Submitted By:

08/24/22