



SUBMITTAL INFORMATION

Flange Coupling Adapter - (BOALFCA-x-Dx style)



BOALFCA™ FLANGED COUPLING ADAPTER FOR JOINING SAME NOMINAL SIZED STEEL, DUCTILE IRON, HDPE, PVC, PVCO, CAST IRON AND A/C PIPES

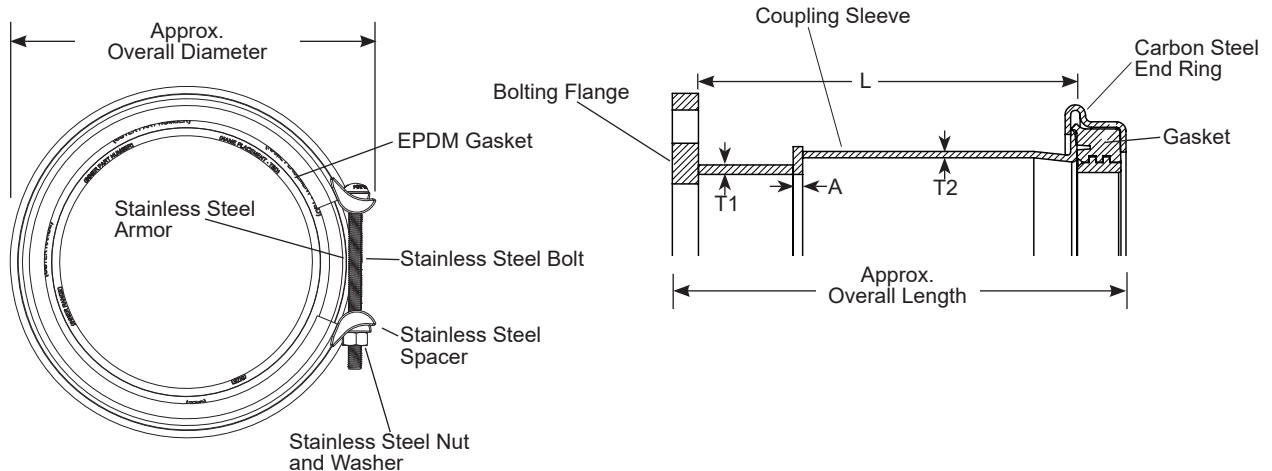

NOM. PIPE SIZE (IN.)	CATALOG NUMBER	FLANGE SIZE (IN.)	TOTAL RANGE (IN.)	RANGE WITH INNER GASKET (IN.)	RANGE W/O INNER GASKET (IN.)	A (IN.)	SLEEVE DIMENSIONS (IN.)			APPROX. OVERALL LENGTH (IN.)	APPROX. OVERALL DIA. (IN.)	SLEEVE THICKNESS (IN.)	APPROX WEIGHT (LBS.)	✓ SUBMITTED ITEM(S)
							L	T1	T2					
4	BOALFCA-4-D4	4	4.25-5.63	4.25-5.00	4.92-5.63	1/4	5-13/16	3/16	11/64	7.94	11.1	0.17	30	
6	BOALFCA-6-D6	6	6.42-7.68	6.42-7.05	7.01-7.68	1/4	6-15/16	3/16	11/64	9.18	12.7	0.17	39	
8	BOALFCA-8-D8	8	8.54-9.84	8.54-9.17	9.13-9.84	1/4	6-15/16	3/16	11/64	9.18	14.8	0.17	49	
10	BOALFCA-10-D10	10	10.70-12.00	10.70-11.37	11.33-12.00	1/4	6-15/16	1/4	11/64	9.18	17	0.17	51	
12	BOALFCA-12-D12	12	12.40-13.66	12.40-13.03	12.99-13.66	1/4	6-15/16	1/4	11/64	9.30	18.5	0.17	67	

FEATURES

- Coupling Sleeve - Grade A steel per ASTM A53
- End Ring - Grade C steel per ASTM A283 / A283M
- Flange - Class D AWWA C207
- Gasket - EPDM rubber per ASTM D2000, removable and replaceable for greater range
- Armor - Type 316 stainless steel per ASTM A240
- Spacers for Bolts and Nuts - Type 316 stainless steel per ASTM A240
- Bolts and Nuts - Type 316 stainless steel per ASTM A193 and A194 with anti-friction coating
- Washers - Type 316 stainless steel per ASTM A193 and A194
- Coating - E-coat epoxy base with black fusion bonded epoxy topcoat
- Maximum allowable deflection - 4°
- Minimum pipe insertion - 2.25"
- Certified to NSF/ANSI 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

08/06/25

Submitted By: