


# SUBMITTAL INFORMATION

## Repair Clamps - (F1-xxx-Length-SH-U100 style)



### 6"-8" STAINLESS STEEL REPAIR CLAMPS WITH EPOXY-COATED DUCTILE IRON LUGS AND 304 STAINLESS STEEL HARDWARE

#### Optional Stainless Taps

ASTM A240 type 304 stainless steel TIG welded to band. Available with AWWA, or I.P. threads.

#### Band

ASTM A240 type 304 stainless steel

#### Lugs

Ductile Iron per ASTM A536  
Finish: E-coat epoxy

#### Nuts and Bolts


Type 304 per ASTM A193 and ASTM A194

#### Gasket

Gridded Virgin SBR compounded for water service, per ASTM D2000. NBR (Buna-N) and EPDM are optional.

#### Armor

ASTM A240 type 304 heavy gauge stainless steel, mold bonded into the gasket to ensure uniform compression against the pipe

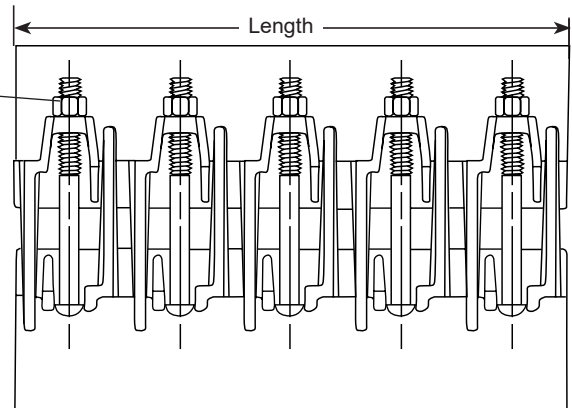

#### OPTIONAL OUTLET THREAD TAP CODE

CC (AWWA) THREAD		IP THREAD	
THREAD	CODE NUMBER	THREAD	CODE No.
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

Note: Tapped clamps are non-returnable.

NOM. PIPE SIZE	PIPE O.D. RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)						BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)	
		7.5"	10"	12.5"	15"	20"	30"					
6"	5.95 - 6.35	12	16	20	24	32	48	5/8" x 6-1/2"	20 GA.	F1-635-Length-SH-U100		
	6.56 - 6.96									F1-696-Length-SH-U100		
	6.84 - 7.24	13	17	21	25	34	51			F1-724-Length-SH-U100		
	7.05 - 7.45									F1-745-Length-SH-U100		
	7.45 - 7.85									F1-785-Length-SH-U100		
8"	7.95 - 8.35	14	19	23	28	37	55			F1-835-Length-SH-U100		
	8.00 - 8.40									F1-840-Length-SH-U100		
	8.54 - 8.94									F1-894-Length-SH-U100		
	8.99 - 9.39									F1-939-Length-SH-U100		
	9.27 - 9.67	15	20	25	29	38	58			F1-967-Length-SH-U100		
	9.70 - 10.10									F1-1010-Length-SH-U100		
Number of Bolts		3	4	5	6	8	12					

#### FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Also available in two- and three- section clamps for a wider range of pipe sizes and tolerances
- Optional outlet taps are available for repair of service line pull-outs. Add tapping code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Removable lugs, epoxy-coated via the e-coat process
- Certified to ANSI/NSF Standard 61
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



#### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/07/22

Submitted By: