


SUBMITTAL INFORMATION

Repair Clamps - (F1-xxxx-Length-EPDM style)

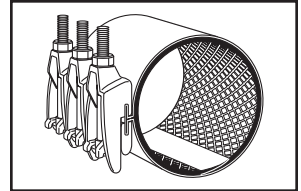

STAINLESS STEEL REPAIR CLAMPS WITH DUCTILE IRON LUGS

Optional Stainless Taps
Type 304 stainless steel TIG welded to band. Available with AWWA or I.P. threads.

Band
Type 304 stainless steel


Lugs
Ductile Iron per ASTM A536
Finish: E-coat epoxy

Nuts and Bolts
High strength, low alloy steel per ASTM A242 and AWWA C111/A21.11. Nuts are fluorocarbon coated.

Optional
Type 304 stainless steel bolts and nuts

Gasket
Gridded Virgin EPDM compounded for water service, per ASTM D2000.

Armor
Type 304 heavy gauge stainless steel, mold bonded into the gasket to ensure uniform compression against the pipe

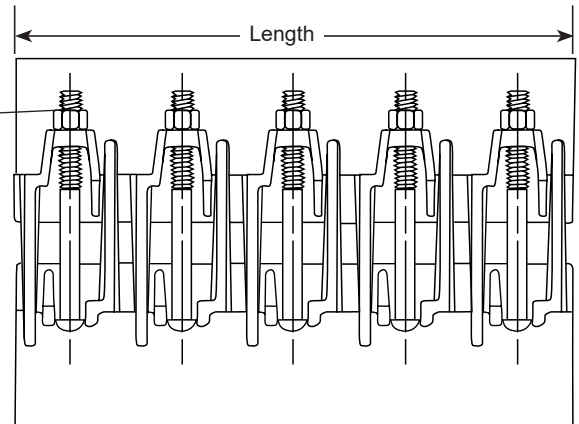

OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
THREAD	CODE NUMBER	THREAD	CODE No.
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

NOM. PIPE SIZE	PIPE O.D. RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)						BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)					
		7.5"	10"	12.5"	15"	20"	30"									
10"	10.10 - 10.50	16	21	26	31	41	62	5/8" x 6-1/2"	20 GA.	F1-1050-Length-EPDM						
	10.60 - 11.04									F1-1104-Length-EPDM						
	11.04 - 11.44									F1-1144-Length-EPDM						
	11.34 - 11.74									F1-1174-Length-EPDM						
	11.75 - 12.15									F1-1215-Length-EPDM						
12"	12.00 - 12.40	17	22	28	33	44	67			F1-1240-Length-EPDM						
	12.10 - 12.50									F1-1250-Length-EPDM						
	12.60 - 13.02									F1-1302-Length-EPDM						
	13.10 - 13.50									F1-1350-Length-EPDM						
	13.40 - 13.80	18	23	29	35	46	70			F1-1380-Length-EPDM						
	13.70 - 14.10									F1-1410-Length-EPDM						
	14.00 - 14.40									F1-1440-Length-EPDM						
	Number of Bolts									3	4	5	6	8	12	

FEATURES

- Drop-in bolt design allows bolts to remain attached - no loose parts to lose in the ditch
- Also available in two- and three- section clamps for a wider range of pipe sizes and tolerances
- Optional Outlet Taps are available for repair of service line pull-outs. Add tapping code to catalog number
- All welds are fully passivated to restore corrosion resistant characteristics of stainless steel
- Removable lugs
- Certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

04/24/24

Submitted By: