



SUBMITTAL INFORMATION

Iron Service Saddles - (F101-xxx-TAP-I style)



F101 SINGLE STRAP IRON SERVICE SADDLES FOR DUCTILE IRON AND A/C PIPE

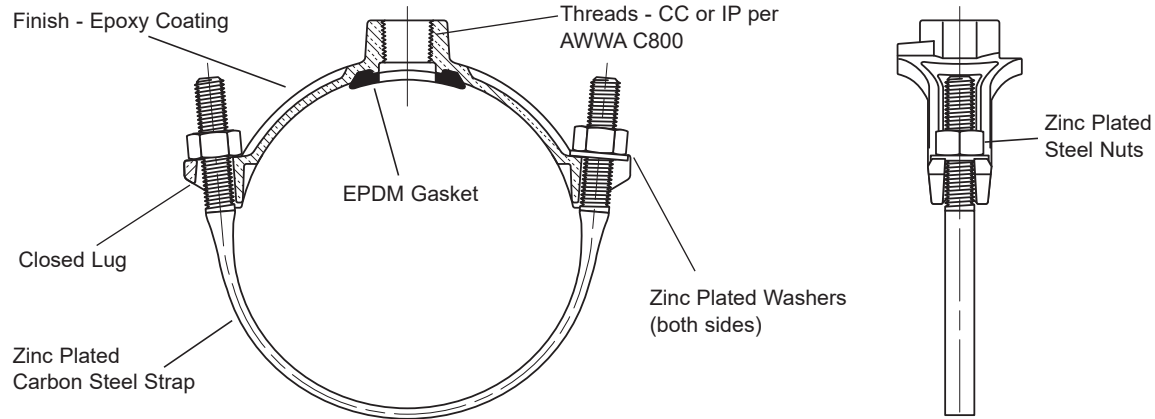

NOM. PIPE SIZE	O.D. RANGE (IN.)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	2.35 - 2.50	1.8	F101-250-TAP-I	
2-1/2"	2.75 - 2.90	2.0	F101-290-TAP-I	
3"	3.46 - 3.80	2.3	F101-380-TAP-I	
	3.80 - 4.25	2.5	F101-425-TAP-I	
4"	4.26 - 4.80	3.0	F101-480-TAP-I	
	4.74 - 5.26	3.2	F101-526-TAP-I	
6"	5.94 - 6.69	3.5	F101-669-TAP-I	
	6.63 - 6.90	3.5	F101-690-TAP-I	
	6.84 - 7.60	3.5	F101-760-TAP-I	
8"	7.93 - 8.71	4.1	F101-871-TAP-I	
	8.63 - 9.05	4.3	F101-905-TAP-I	
	8.99 - 9.79	4.5	F101-979-TAP-I	
10"	10.00 - 10.75	5.8	F101-1075-TAP-I	
	11.10 - 12.12	5.8	F101-1212-TAP-I	
12"	12.00 - 12.75	7.0	F101-1275-TAP-I	
	13.20 - 14.38	7.0	F101-1438-TAP-I	

I = Import casting

OUTLET TAP CODE

CC (AWWA) THREAD			IP THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)	THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
1/2" CC	CC1		1/2" IP	IP1	
3/4" CC	CC3		3/4" IP	IP3	
1" CC	CC4		1" IP	IP4	

FEATURES

- Body made of high strength ductile iron per ASTM A536
- Straps are 5/8" AISI C1010 steel, zinc plated with trivalent seal. Each strap has a 5/8" flat bearing surface. For saddles 3" or smaller, straps are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- Finish on saddle body is fusion-bonded epoxy coating
- Certified to ANSI/NSF Standard 61
- Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

08/05/22

Submitted By: