

### SUBMITTAL INFORMATION





# F202 DOUBLE STAINLESS STEEL STRAP IRON SERVICE SADDLES FOR DUCTILE IRON AND A/C PIPE

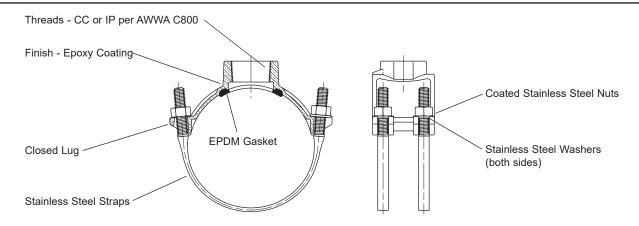

| Nom.Pipe<br>Size | O.D.<br>Range (In.)         | APPROX.<br>Wt. Lbs. | Catalog<br>Number | ✓ SUBMITTED ITEM(S) |
|------------------|-----------------------------|---------------------|-------------------|---------------------|
| 4"               | <b>▲</b> 4.74 <b>-</b> 5.00 | 5.4                 | F202-500-TAP-SSB  |                     |
|                  | *4.74 - 5.26                | 5.4                 | F202-526-TAP-SSB  |                     |
|                  | <b>▲</b> 4.97 <b>-</b> 5.26 | 5.4                 | F202-526-TAP-SSB  |                     |
| 6"               | 6.63 - 6.90                 | 6.5                 | F202-690-TAP-SSB  |                     |
|                  | 6.84 - 7.60                 | 6.8                 | F202-760-TAP-SSB  |                     |
| 8"               | 8.63 - 9.05                 | 7.4                 | F202-905-TAP-SSB  |                     |
|                  | 8.99 - 9.79                 | 8.2                 | F202-979-TAP-SSB  |                     |
| 10"              | 11.10 - 12.12               | 11.5                | F202-1212-TAP-SSB |                     |
| 12"              | 12.75 - 13.20               | 12.5                | F202-1320-TAP-SSB |                     |
| 16"              | 17.40 - 18.40               | 17.0                | F202-1840-TAP-SSB |                     |

<sup>\*</sup> Saddles for this pipe range are <u>not</u> available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

## OUTLET TAP CODE

| CC (AVVVA) THREAD      |             |                     |  |  |  |  |  |  |
|------------------------|-------------|---------------------|--|--|--|--|--|--|
| THREAD                 | CODE NUMBER | √ SUBMITTED ITEM(S) |  |  |  |  |  |  |
| 3/4" CC                | CC3         |                     |  |  |  |  |  |  |
| 1" CC                  | CC4         |                     |  |  |  |  |  |  |
| 1-1/4" CC              | ∆ CC5       |                     |  |  |  |  |  |  |
| 1-1/2" CC              | CC6         |                     |  |  |  |  |  |  |
| 2" CC                  | CC7         |                     |  |  |  |  |  |  |
| IP THREAD              |             |                     |  |  |  |  |  |  |
| THREAD                 | CODE NUMBER | √ SUBMITTED ITEM(S) |  |  |  |  |  |  |
| 3/4" IP                | IP3         |                     |  |  |  |  |  |  |
| 1" IP                  | IP4         |                     |  |  |  |  |  |  |
|                        | 11 7        |                     |  |  |  |  |  |  |
| 1-1/4" IP              | Δ IP5       |                     |  |  |  |  |  |  |
| 1-1/4" IP<br>1-1/2" IP |             |                     |  |  |  |  |  |  |

<sup>∆</sup> Contact factory for availability

2-1/2" IP

IP8

#### **FEATURES**

- Body made of high strength ductile iron per ASTM A536
- Straps are 5/8" stainless steel per ASTM A493, Grade 305 (UNS 530500). Each strap has a 5/8" flat bearing surface
- Gasket is EPDM rubber per ASTM D2000
- Finish on saddle body is fusion bonded epoxy coating
- Certified to ANSI/NSF Standard 61
- · Rated for the lesser of 350 psi or the pressure of the pipe on which it is installed
- Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



#### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com

10/13/23

|  | nitte |  |
|--|-------|--|
|  |       |  |
|  |       |  |

<sup>▲</sup> This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.