




SUBMITTAL INFORMATION

Iron Service Saddles - (FC202-xxx-TAP-Q style)

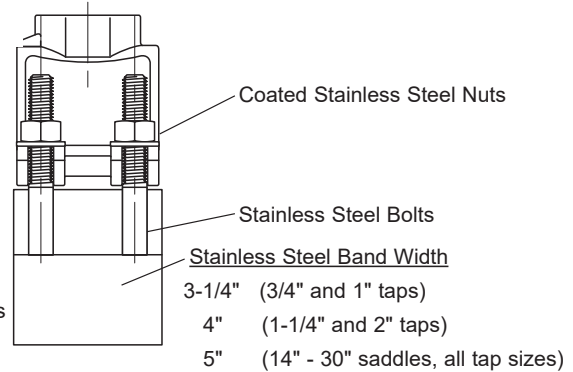

FC202 EPOXY COATED DOUBLE WIDE BAND IRON SERVICE SADDLES FOR DUCTILE IRON AND A/C PIPE

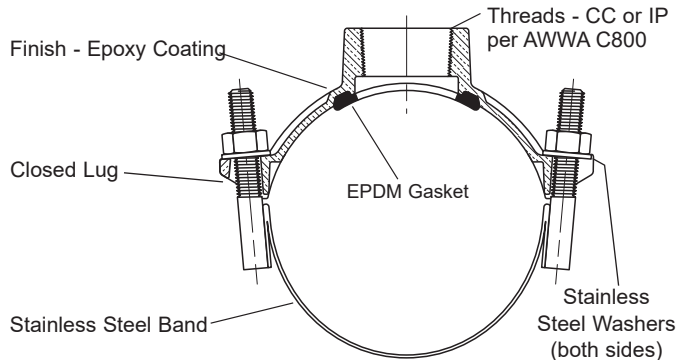

NOM. PIPE SIZE (IN.)	O.D. RANGE	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2	2.35 - 2.50	2.8	FC202-250-TAP-Q	
2-1/2	2.75 - 2.90	2.8	FC202-290-TAP-Q	
3	*3.46 - 3.80	4.8	FC202-380-TAP-Q	
	*3.80 - 4.25	5.5	FC202-425-TAP-Q	
	**4.26 - 4.80	5.4	FC202-480-TAP-Q	
4	▲ 4.74 - 5.00	5.4	FC202-500-TAP-Q	
	*4.74 - 5.26	5.4	FC202-526-TAP-Q	
	▲ 4.97 - 5.26	5.4	FC202-526-TAP-Q	
	4.50 - 5.40	5.4	FC202-540-TAP-Q	
	5.94 - 6.69	5.7	FC202-669-TAP-Q	
6	6.63 - 6.90	5.7	FC202-690-TAP-Q	
	6.84 - 7.60	6.7	FC202-760-TAP-Q	
	6.63 - 7.61	6.7	FC202-761-TAP-Q	
	7.93 - 8.71	6.8	FC202-871-TAP-Q	
8	8.63 - 9.05	8.2	FC202-905-TAP-Q	
	8.99 - 9.79	8.4	FC202-979-TAP-Q	
	8.63 - 9.80	8.4	FC202-980-TAP-Q	
	10.00 - 10.75	9.4	FC202-1075-TAP-Q	
10	10.75 - 11.10	9.0	FC202-1110-TAP-Q	
	11.10 - 12.12	10.8	FC202-1212-TAP-Q	
	10.64 - 12.13	10.8	FC202-1213-TAP-Q	
	12.00 - 12.75	11.0	FC202-1275-TAP-Q	
12	12.75 - 13.20	9.0	FC202-1320-TAP-Q	
	13.20 - 14.38	12.8	FC202-1438-TAP-Q	
	12.62 - 14.39	12.8	FC202-1439-TAP-Q	
	15.30 - 16.25	11.9	FC202-1625-TAP-Q	
14	16.30 - 17.25	12.9	FC202-1725-TAP-Q	
	17.40 - 18.40	13.1	FC202-1840-TAP-Q	
16	18.50 - 19.25	12.3	FC202-1925-TAP-Q	
18	19.50 - 20.50	13.1	FC202-2050-TAP-Q	
20	21.20 - 22.20	13.2	FC202-2220-TAP-Q	
	22.50 - 23.50	13.3	FC202-2350-TAP-Q	
24	23.80 - 24.80	13.4	FC202-2480-TAP-Q	
	25.60 - 26.50	13.9	FC202-2650-TAP-Q	
30	31.74 - 32.74	14.8	FC202-3274-TAP-Q	

* Saddles with this pipe range are not available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

** These saddles with 2" CC (CC7) or 2-1/2" IP (IP8) taps only fit 4.80" O.D. pipe. Example: FC202-480-CC7 fits 4.80 pipe O.D. only.

▲ This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

■ These saddles are only available with 3/4" CC/IP or 1" CC/IP threads

OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	Δ CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD

THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

Δ Contact factory for availability

FEATURES

- Body made of high strength ductile iron per ASTM A536
- Double wide band and 5/8" UNC threaded bolts of type 316L stainless steel. For saddles 3" or smaller, bolts are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- Finish on saddle body is fusion bonded epoxy coating
- Certified to ANSI/NSF 61
- Rated for the lesser of 350 psi on sizes 2"-12", 250 psi on sizes 14"-30", or the pressure of the pipe on which it is installed

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/17/25

Submitted By: