


# SUBMITTAL INFORMATION

## Fabricated Steel Saddle- (FC202-xxxx-TAP-Q style)





### 14"-30" FABRICATED STEEL SADDLE - WITH STAINLESS STEEL BAND (3" & 4" TAPS)

Tap - Iron Pipe Thread  
per AWWA C800

5/8" Studs Type 316  
Stainless Steel per ASTM  
A193 and A194

Heavy hex nuts and  
washers - Type 316  
Stainless Steel per ASTM  
A193 and A194. Nuts are  
coated to prevent galling

Gasket - NBR (Buna-N)  
Rubber per ASTM D2000

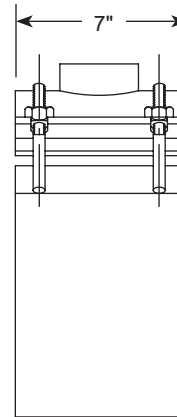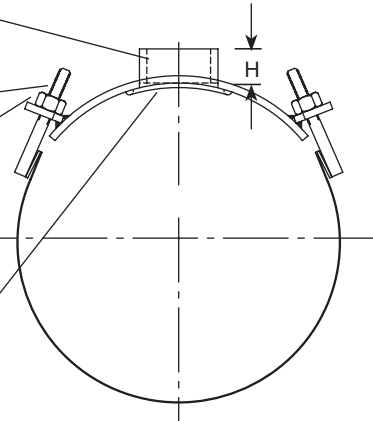

Body - Fabricated Steel  
Finish - Fusion-bonded  
Epoxy

Band - Type 316 Stainless  
Steel

| NOM.<br>PIPE<br>SIZE | ACTUAL<br>PIPE<br>O.D. (IN.) | TAP<br>SIZE<br>(INCHES) | BOSS<br>HEIGHT<br>H | APPROX.<br>WT.<br>LBS. | CATALOG<br>NUMBER | ✓ SUBMITTED<br>ITEM(S) |
|----------------------|------------------------------|-------------------------|---------------------|------------------------|-------------------|------------------------|
| 14"                  | 14.00                        | 3                       | 3-1/16"             | 22.0                   | FC202-1400-IP9-Q  |                        |
|                      | 14.00                        | 4                       | 3-5/16"             | 23.0                   | FC202-1400-IP11-Q |                        |
|                      | 15.30                        | 3                       | 3-1/16"             | 22.6                   | FC202-1530-IP9-Q  |                        |
|                      | 15.30                        | 4                       | 3-5/16"             | 23.4                   | FC202-1530-IP11-Q |                        |
| 16"                  | 16.00                        | 3                       | 3-1/16"             | 23.5                   | FC202-1600-IP9-Q  |                        |
|                      | 16.00                        | 4                       | 3-5/16"             | 23.9                   | FC202-1600-IP11-Q |                        |
|                      | 17.40                        | 3                       | 1-7/16"             | 23.7                   | FC202-1740-IP9-Q  |                        |
|                      | 17.40                        | 4                       | 1-9/16"             | 24.6                   | FC202-1740-IP11-Q |                        |
|                      | 17.80                        | 3                       | 1-7/16"             | 23.8                   | FC202-1780-IP9-Q  |                        |
|                      | 17.80                        | 4                       | 1-9/16"             | 24.1                   | FC202-1780-IP11-Q |                        |
| 18"                  | 18.00                        | 3                       | 1-7/16"             | 24.0                   | FC202-1800-IP9-Q  |                        |
|                      | 18.00                        | 4                       | 1-9/16"             | 24.4                   | FC202-1800-IP11-Q |                        |
|                      | 19.50                        | 3                       | 1-7/16"             | 24.5                   | FC202-1950-IP9-Q  |                        |
|                      | 19.50                        | 4                       | 1-9/16"             | 24.9                   | FC202-1950-IP11-Q |                        |
| 20"                  | 20.00                        | 3                       | 1-7/16"             | 24.9                   | FC202-2000-IP9-Q  |                        |
|                      | 20.00                        | 4                       | 1-9/16"             | 25.4                   | FC202-2000-IP11-Q |                        |
|                      | 21.60                        | 3                       | 1-7/16"             | 25.0                   | FC202-2160-IP9-Q  |                        |
|                      | 21.60                        | 4                       | 1-9/16"             | 25.8                   | FC202-2160-IP11-Q |                        |
| 24"                  | 24.00                        | 3                       | 1-7/16"             | 25.9                   | FC202-2400-IP9-Q  |                        |
|                      | 24.00                        | 4                       | 1-9/16"             | 26.3                   | FC202-2400-IP11-Q |                        |
|                      | 25.80                        | 3                       | 1-7/16"             | 27.0                   | FC202-2580-IP9-Q  |                        |
|                      | 25.80                        | 4                       | 1-9/16"             | 27.5                   | FC202-2580-IP11-Q |                        |
| 30"                  | 30.00                        | 3                       | 1-7/16"             | 28.3                   | FC202-3000-IP9-Q  |                        |
|                      | 30.00                        | 4                       | 1-9/16"             | 28.7                   | FC202-3000-IP11-Q |                        |
|                      | 32.00                        | 3                       | 1-7/16"             | 29.9                   | FC202-3200-IP9-Q  |                        |
|                      | 32.00                        | 4                       | 1-9/16"             | 30.4                   | FC202-3200-IP11-Q |                        |

### FEATURES

- Boss tapped with iron pipe threads.
- Body made of carbon steel per ASTM A36
- Finish on saddle body is fusion-bonded epoxy coating - NSF 61 approved
- Double wide band and 5/8" UNC threaded studs of type 316 stainless steel
- Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

10/05/22

Submitted By: