

SUBMITTAL INFORMATION





10" - COUPLINGS FOR JOINING PLAIN END PIPES WITH DIFFERENT O.D.'S

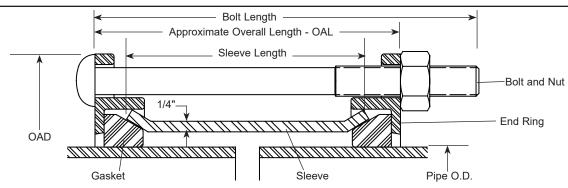

Nом.	GASKET RANGE (IN.)		CENTER SLEEVE		Вогтѕ				Appnov		CUDALITED
PIPE	1st End	2ND END	LENGTH	APPROX.	No.	DIA.	LENGTH	OAD	APPROX. Wt. Lbs.	CATALOG NUMBER	SUBMITTED ITEM(S)
SIZE	131 END	ZND LND	LENGIH	OAL	140.	DIA.	LENGIH		W1. LB3.		TTEW(3)
10"	11.10-11.40	11.77-12.12	15"	16-1/8"	6	5/8"	20"	15-11/16"	69	FC23-1140-1212-15R	

Note: Flexible couplings do not restrain axial forces on piping.

FEATURES

- Sleeve ASTM A36 carbon steel
- End Ring Ductile iron per ASTM A536. Color coded to match gasket
- Gasket SBR Molded Rubber: embossed with size and end ring color code.
 Optional NBR (Buna-N) or EPDM
- Bolts & Nuts High strength low alloy steel per ASTM A242 & AWWA C111.
 Optional: Types 304 and 316 stainless or electro galvanized
- Finish Black shop coat with color coded end rings. Optional fusion bonded epoxy
- 200 PSI rated working pressure
- NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

08/30/22

	nitte	