



# SUBMITTAL INFORMATION

## Fabricated Steel Coupling - (FC4-xxxx-AxxR style)



### 16"-20" STYLE FC4 COUPLINGS FOR JOINING PIPES WITH THE SAME O.D.

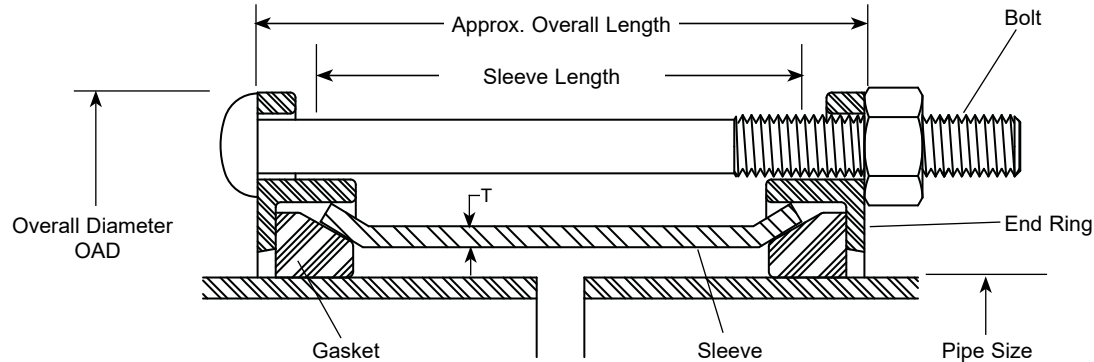

NOM. PIPE SIZE	PIPE O.D. (IN.)	CENTER SLEEVE		APPROX. OVERALL LGTH.	BOLT			APPROX. WT. LBS.	OAD	RATED WORKING PRESSURE (PSI)	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		LGTH.	(T)THICKNESS		DIA.	LGTH.	QTY.					
16"	16.63	24"	1/4"	25-1/8"	5/8"	27-1/2"	10	180	21-1/4"	416	FC4-1663-A24R	
18"	18.13	5"	1/4"	6-1/8"	5/8"	8-1/2"	11	69	22-3/4"	373	FC4-1813-A05R	
		7"		8-1/8"		10-1/2"		94			FC4-1813-A07R	
		10"		11-1/8"		13-1/2"		107			FC4-1813-A10R	
20"	21.60	24"	1/4"	25-1/8"	5/8"	27-1/2"	12	210	25-1/4"	313	FC4-2160-A24R	

**Note:** Flexible couplings do not restrain axial forces on piping.

## FEATURES

- Center Sleeve - Carbon steel per ASTM A36
- End Rings - Cold rolled carbon steel per AISI 1018-1020
- Bolts and Nuts - High strength low alloy steel per ASTM A242 or AWWA C111
- Gasket - Extruded SBR rubber per ASTM D2000
- Coating - Black alkyd enamel shop coat - NSF 61 approved
- Complies with AWWA C219 standards

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

08/10/20

Submitted By: