



SUBMITTAL INFORMATION

Iron Service Saddles - (FCD202-xxx-TAP-Q style)



DUAL BAND EPOXY COATING IRON SERVICE SADDLES (WITH 316 STAINLESS STEEL HARDWARE) FOR USE ON DUCTILE IRON AND A/C PIPE

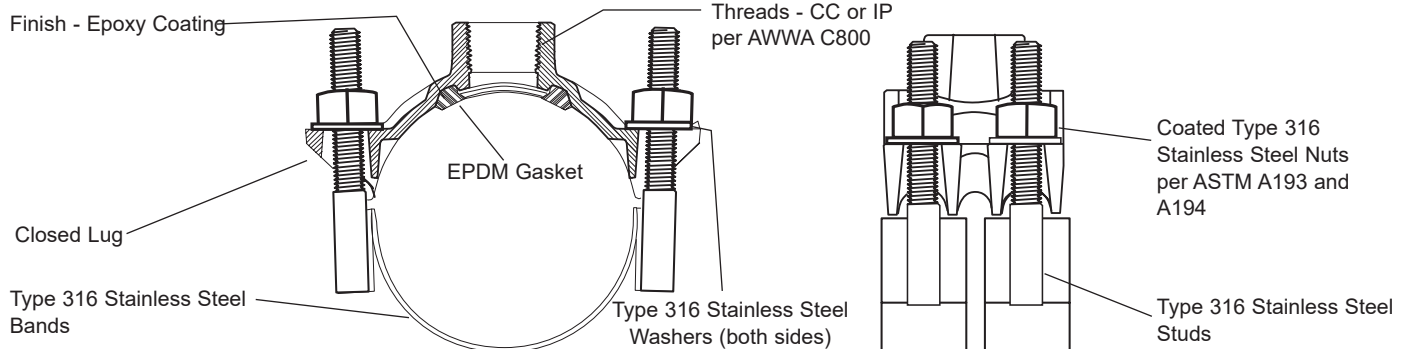

NOM. PIPE SIZE	O.D. RANGE (INCHES)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	■ 2.35 - 2.50	2.8	FCD202-250-TAP-Q	
2-1/2"	■ 2.75 - 2.90	2.8	FCD202-290-TAP-Q	
3"	*3.46 - 3.80	4.8	FCD202-380-TAP-Q	
	*3.80 - 4.25	5.5	FCD202-425-TAP-Q	
4"	**4.26 - 4.80	5.4	FCD202-480-TAP-Q	
	▲4.74 - 5.00	5.4	FCD202-500-TAP-Q	
	*4.74 - 5.26	5.4	FCD202-526-TAP-Q	
	▲4.97 - 5.26	5.4	FCD202-526-TAP-Q	
	4.50 - 5.40	5.4	FCD202-540-TAP-Q	
6"	5.94 - 6.69	5.7	FCD202-669-TAP-Q	
	6.63 - 6.90	5.7	FCD202-690-TAP-Q	
	6.84 - 7.60	6.7	FCD202-760-TAP-Q	
	6.63 - 7.61	6.7	FCD202-761-TAP-Q	
	7.93 - 8.71	6.8	FCD202-871-TAP-Q	
8"	8.63 - 9.05	8.2	FCD202-905-TAP-Q	
	8.99 - 9.79	8.4	FCD202-979-TAP-Q	
	8.63 - 9.80	8.4	FCD202-980-TAP-Q	
	10.00 - 10.75	9.4	FCD202-1075-TAP-Q	
10"	10.75 - 11.10	9.0	FCD202-1110-TAP-Q	
	11.10 - 12.12	10.8	FCD202-1212-TAP-Q	
	10.64 - 12.13	10.8	FCD202-1213-TAP-Q	
12"	12.00 - 12.75	11.0	FCD202-1275-TAP-Q	
	12.75 - 13.20	9.0	FCD202-1320-TAP-Q	
	13.20 - 14.38	12.8	FCD202-1438-TAP-Q	
	12.62 - 14.39	12.8	FCD202-1439-TAP-Q	
14"	15.30 - 16.25	11.9	FCD202-1625-TAP-Q	
	16.30 - 17.25	12.9	FCD202-1725-TAP-Q	
16"	17.40 - 18.40	13.1	FCD202-1840-TAP-Q	
18"	18.50 - 19.25	12.3	FCD202-1925-TAP-Q	
	19.50 - 20.50	13.1	FCD202-2050-TAP-Q	
20"	21.20 - 22.20	13.2	FCD202-2220-TAP-Q	
	22.50 - 23.50	13.3	FCD202-2350-TAP-Q	
24"	23.80 - 24.80	13.4	FCD202-2480-TAP-Q	
	25.60 - 26.50	13.9	FCD202-2650-TAP-Q	
30"	31.74 - 32.74	14.8	FCD202-3274-TAP-Q	

* Saddles with this pipe range are not available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

** These saddles with 1-1/2" through 2-1/2" taps fit the top of the listed range only. Example: FCD202-480-CC7-Q fits 4.80" pipe O.D. only.

▲ This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

■ These saddles are only available with 3/4" CC/IP or 1" CC/IP threads

OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	Δ CC5	
1-1/2" CC	CC6	
2" CC	CC7	
IP THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

Δ Contact factory for availability

FEATURES

- Body made of high strength ductile iron per ASTM A536
- Each dual band and 5/8" UNC threaded studs are type 316 stainless steel. For saddles 3" or smaller, studs are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- Finish on saddle body is fusion bonded epoxy coating
- Certified to ANSI/NSF 61
- Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

11/18/25

Submitted By: