

SUBMITTAL INFORMATION





DUAL BAND EPOXY COATED IRON SERVICE SADDLES FOR C900/C905 PVC PIPE

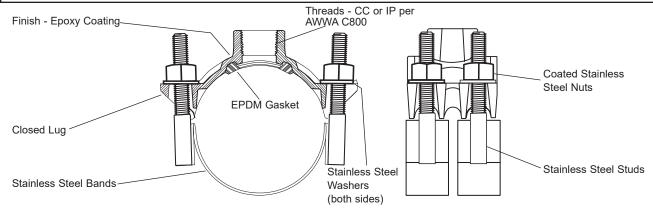

| Nom. Pipe | O.D. | APPROX. | CATALOG | ✓ SUBMITTED |
|------------|-------------|----------|----------------------|-------------|
| SIZE (IN.) | RANGE (IN.) | Wt. Lbs. | Number | ITEM(S) |
| 4 | 4.80 | 5.4 | FCD202-480-TAP-U100 | |
| 6 | 6.90 | 5.7 | FCD202-690-TAP-U100 | |
| 8 | 9.05 | 8.2 | FCD202-905-TAP-U100 | |
| 10 | 11.10 | 9.0 | FCD202-1110-TAP-U100 | |
| 12 | 13.20 | 9.0 | FCD202-1320-TAP-U100 | |
| 14 | 15.30 | 11.9 | FCD202-1530-TAP-U100 | |
| 16 | 17.40 | 13.1 | FCD202-1740-TAP-U100 | |
| 18 | 19.50 | 13.1 | FCD202-1950-TAP-U100 | |
| 20 | 21.60 | 13.2 | FCD202-2160-TAP-U100 | |
| 24 | 25.80 | 13.9 | FCD202-2580-TAP-U100 | |
| 30 | 32.00 | 14.8 | FCD202-3200-TAP-U100 | |

OUTLET TAP CODE

| | CC (AWWA |) THREAD |
|-----------|-------------|---------------------|
| THREAD | CODE NUMBER | √ SUBMITTED ITEM(S) |
| 3/4" CC | CC3 | |
| 1" CC | CC4 | |
| 1-1/4" CC | CC5 | |
| 1-1/2" CC | CC6 | |
| 2" CC | CC7 | |
| 2" CC | CC7 | |

| | IP THE | READ |
|-----------|-------------|---------------------|
| THREAD | CODE NUMBER | √ SUBMITTED ITEM(S) |
| 3/4" IP | IP3 | |
| 1" IP | IP4 | |
| 1-1/4" IP | IP5 | |
| 1-1/2" IP | IP6 | |
| 2" IP | IP7 | |
| 2-1/2" IP | IP8 | |

FEATURES

- Body made of high strength ductile iron per ASTM A536
- Each dual band and 5/8" UNC threaded studs are type 304 stainless steel
- Gasket is EPDM rubber per ASTM D2000
- · Finish on saddle body is fusion bonded epoxy coating
- Certified to ANSI/NSF 61
- Conforms to AWWA C800
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

|--|