



SUBMITTAL INFORMATION


Dismantling Joint - (FDJ-DxxQ-R style)



RESTRAINED DISMANTLING JOINT - CLASS D FLANGE

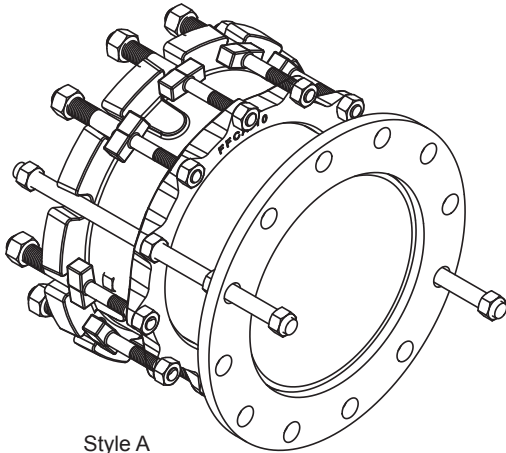

Style A

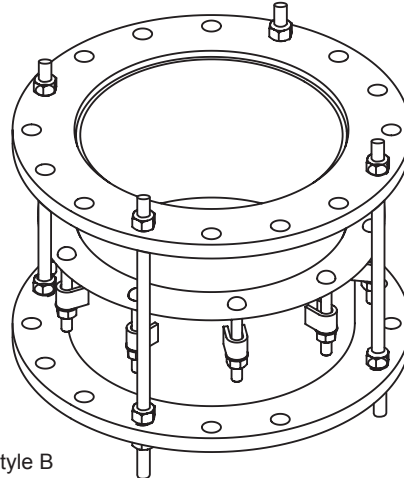

Style B

NOMINAL SIZE	CATALOG NUMBER	NOMINAL LENGTH	MINIMUM LENGTH	MAXIMUM LENGTH	RESTRAINT RODS		STYLE	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEM(S)
					NUMBER	SIZE			
3"	FDJ-D3Q-R	8-5/16"	7-1/2"	9-1/8"	2	5/8" x 14"	A	31	
4"	FDJ-D4Q-R	8-1/16"	7-1/8"	9"	2	5/8" x 14"	A	39	
6"	FDJ-D6Q-R	12-3/4"	11-1/4"	14-1/4"	2	3/4" x 22"	B	67	
8"	FDJ-D8Q-R	15"	13-1/4"	16-3/4"	2	3/4" x 24"	B	88	
10"	FDJ-D10Q-R	15-1/4"	13-1/2"	17"	2	7/8" x 24"	B	93	
12"	FDJ-D12Q-R	15-1/2"	14"	17"	3	7/8" x 24"	B	165	
14"	FDJ-D14Q-R	14-3/4"	13-1/4"	16-1/4"	4	1" x 24"	B	192	
16"	FDJ-D16Q-R	15"	13-1/2"	16-1/2"	4	1" x 24"	B	249	
18"	FDJ-D18Q-R	15-1/8"	13-5/8"	16-5/8"	4	1-1/8" x 24"	B	270	
20"	FDJ-D20Q-R	15-1/8"	13-5/8"	16-5/8"	4	1-1/8" x 24"	B	310	
24"	FDJ-D24Q-R	15-1/4"	13-3/4"	16-3/4"	4	1-1/4" x 30"	B	396	
30"	FDJ-D30Q-R	15-7/8"	14-3/4"	17"	7	1-1/4" x 30"	B	605	
36"	FDJ-D36Q-R	16-1/4"	15-1/4"	17-1/4"	8	1-1/2" x 30"	B	971	
42"	FDJ-D42Q-R	15-1/2"	13-3/4"	17-1/4"	9	1-1/2" x 30"	B	1275	
48"	FDJ-D48Q-R	17-3/8"	15-3/4"	19"	11	1-1/2" x 36"	B	1567	

FEATURES

- Flange - AWWA Class D flange, drilling per ANSI/AWWA C110/A21, ANSI B16.5 150 lb.
- Flange and adjusting pipe - ASTM A36 carbon steel
- Gaskets - Extruded SBR rubber per ASTM D2000
- Bolts and nuts - Type 316 stainless steel per ASTM A193 and A194
- Tie rods - Type 316 stainless steel per ASTM A193 and A194
- Black enamel shop coat - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/31/22

Submitted By: